Hospital & Homecare

Hospital & Home Care I/E. Co.,Ltd.

Catalogue: 6



Body fat/hydration monitor scale

Mechanical personal scale





Body weight balance



Baby balance

Electronic balance



CONTENTS

Body fat/hydration monitor scale

Electronic personal scale

Electronic personal scale with LED

Mechanical personal scale

Electronic/Mechanical kitchen scale

Small health monitor product

Electronic/Mechanical body weight balance

Electronic/Mechanical baby balance

Stature meter series

Balance instruments series

Electronic balance series

BODY FAT/HYDRATION MONITOR SCALE



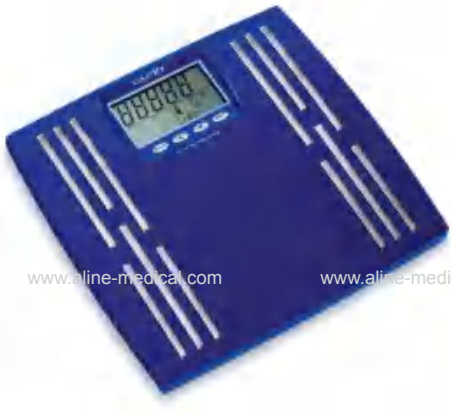
MF1a



MF1b



MF1c



MF2a



MF2b



MF2c



MF3a



MF3b



MF3c

MF1a/MF1b/MF1c

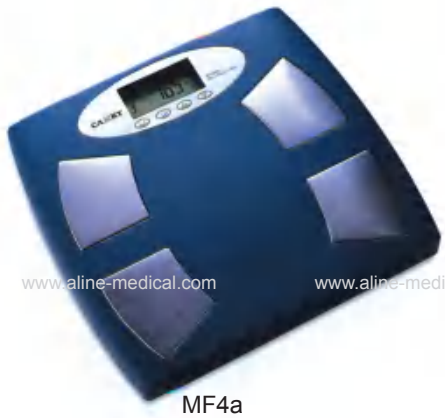
Body fat and hydration % differential resolution:0.1%
Memory:8 persons
Body fat measure range:4.0-45.0%
Body hydration measure range:37.8-66.0%
Max.weight capacity:150 kg/330 lb/24 stone
Min.effective at:2.0 kg/4.4 lb
Division:100 g/0.2 lb
Display screen:95x52.5 mm
User modes:adult,child(age 10-99)
Power:1x9V battery(not included)
Dimensions of the scale:30.5x31.5x4.6cm
Dimensions of colour box:35.5x32.2x7.1cm
Packing volume:37.8x33.8x38cm 5 pcs/ctn
N.W.:6.5kg G.W.: 9.5kg
20 feet container can hold 3060 pcs
40 feet container can hold 6120 pcs

MF2a/MF2b/MF2c

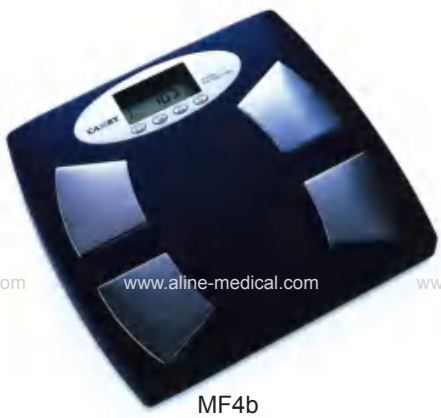
Body fat and hydration % differential resolution:0.1%
Memory:8 persons
Body fat measure range:4.0-45.0%
Body hydration measure range:37.8-66.0%
Max.weight capacity:150 kg/330 lb/24 stone
Min.effective at:2.0 kg/4.4 lb
Division:100 g/0.2 lb
Display screen:95x52.5 mm
User modes:adult,child(age 10-99)
Power:1x9V battery(not included)
Dimensions of the scale:29.2x31.1x4.3cm
Dimensions of colour box:35.5x32.2x7.1cm
Packing volume:37.8x33.8x38cm 5 pcs/ctn
N.W.:6.5kg G.W.: 9.5kg
20 feet container can hold 3060 pcs
40 feet container can hold 6120 pcs

MF3a/MF3b/MF3c

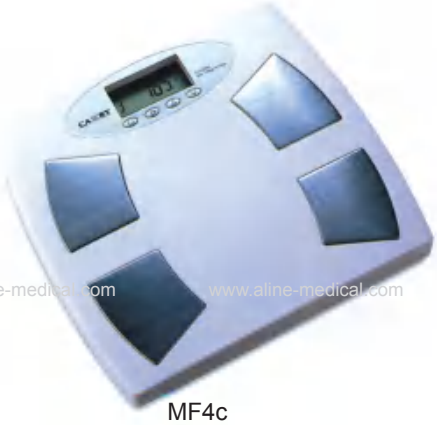
Body fat and hydration % differential resolution:0.1%
Memory:8 persons
Body fat measure range:4.0-45.0%
Body hydration measure range:37.8-66.0%
Max.weight capacity:150 kg/330 lb/24 stone
Min.effective at:2.0 kg/4.4 lb
Division:100 g/0.2 lb
Display screen:76x38 mm
User modes:adult,child(age 10-100)
Power:4x1.5V AA batteries(not included)
Dimensions of the scale:32.6x30x5cm
Dimensions of colour box:37.4x34.5x7.5cm
Packing volume:39.5x36.2x32.5cm 4 pcs/ctn
N.W.:10.2kg G.W.: 11.9kg
20 feet container can hold 2408 pcs
40 feet container can hold 4984 pcs



MF4a



MF4b



MF4c



MF5a

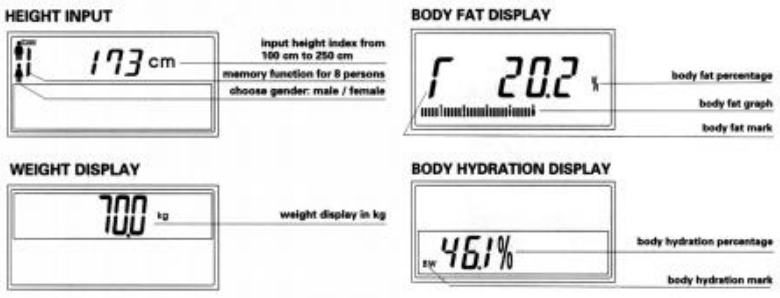


MF5b



MF5c





MF6

MF4a/MF4b/MF4c

Body fat and hydration % differential resolution:0.1%
Memory:8 persons
Body fat measure range:4.0-45.0%
Body hydration measure range:37.8-66.0%
Max.weight capacity:150 kg/330 lb/24 stone
Min.effective at:2.0 kg/4.4 lb
Division:100 g/0.2 lb
Display screen:76x38 mm
User modes:adult,child(age 10-100)
Power:4x1.5V AA batteries(not included)
Dimensions of the scale:32.6x30x5cm
Dimensions of colour box:37.4x34.5x7.5cm
Packing volume:39.5x36.2x32.5cm 4 pcs/ctn
N.W.:10.2kg G.W.: 11.9kg
20 feet container can hold 2408 pcs
40 feet container can hold 4984 pcs

MF5a/MF5b/MF5c

Body fat and hydration % differential resolution:0.1%
Memory:8 persons
Body fat measure range:4.0-45.0%
Body hydration measure range:37.8-66.0%
Max.weight capacity:150 kg/330 lb/24 stone
Min.effective at:2.0 kg/4.4 lb
Division:100 g/0.2 lb
Display screen:76x38 mm
User modes:adult,child(age 10-100)
Power:4x1.5V AA batteries(not included)
Dimensions of the scale:30x31.1x5.15cm
Dimensions of colour box:35.0x33.6x7.3cm
Packing volume:37x35x31.5cm 4 pcs/ctn
N.W.:10kg(MF5c),10.4kg(MF5a/MF5b)
G.W.: 12.1kg
20 feet container can hold 2688 pcs
40 feet container can hold 5544 pcs

MF6

Body fat and hydration % differential resolution:0.1%
Memory:8 persons
Body fat measure range:4.0-45.0%
Body hydration measure range:37.8-66.0%
Max.weight capacity:150 kg/330 lb/24 stone
Min.effective at:2.0 kg/4.4 lb
Division:100 g/0.2 lb
Display screen:91x38 mm
User modes:adult,child(age 10-100)
Power:4x1.5V AA batteries(not included)
Dimensions of the scale:36.5x27.8x13.1cm
Dimensions of colour box:40.0x31x16cm
Packing volume:64x42.5x35cm 4 pcs/ctn
N.W.:11.6kg G.W.: 15.1kg
20 feet container can hold 1080 pcs
40 feet container can hold 2160 pcs



MF7a



MF7b



MF7c



MF8a



MF8b



MF8c



MF9a



MF9b

MF7a/MF7b/MF7c

Body fat and hydration % differential
resolution:0.1%
Memory:8 persons
Body fat measure range:4.0-45.0%
Body hydration measure range:37.8-66.0%
Max.weight capacity:150 kg/330 lb/24 stone
Min.effective at:2.0 kg/4.4 lb
Division:100 g/0.2 lb
Display screen:120x50 mm
User modes:adult,child(age 10-100)
Power:1x9V battery(not included)
Dimensions of the scale:31.9x35.2x4.6cm
Dimensions of colour box:34.5x39x5.8cm
Packing volume:40.5x36x32.5cm 5 pcs/ctn
N.W.:10.3kg G.W.: 12.9kg
20 feet container can hold 3080 pcs
40 feet container can hold 6160 pcs

MF8a/MF8b/MF8c

Body fat and hydration % differential
resolution:0.1%
Memory:8 persons
Body fat measure range:4.0-45.0%
Body hydration measure range:37.8-66.0%
Max.weight capacity:150 kg/330 lb/24 stone
Min.effective at:2.0 kg/4.4 lb
Division:100 g/0.2 lb
Display screen:76x38 mm
User modes:adult,child(age 10-100)
Power:1x9V battery(not included)
Dimensions of the scale:31x30x4.8cm
Dimensions of colour box:35.8x34.8x7.0cm
Packing volume:37x36.5x36cm 5 pcs/ctn
N.W.:11.3kg G.W.: 13.5kg
20 feet container can hold 2700 pcs
40 feet container can hold 5580 pcs

MF9a/MF9b

Body fat and hydration % differential
resolution:0.1%
Memory:8 persons
Body fat measure range:4.0-45.0%
Body hydration measure range:37.8-66.0%
Max.weight capacity:150 kg/330 lb/24 stone
Min.effective at:2.0 kg/4.4 lb
Division:100 g/0.2 lb
Display screen:76x38 mm
User modes:adult,child(age 10-100)
Power:1x9V battery(not included)
Dimensions of the scale:31.7x31.2x4.2cm
Dimensions of colour box:36.8x34.6x5.7cm
Packing volume:38.3x35.8x30.5cm 5 pcs/ctn
N.W.:11.8kg G.W.: 14.1kg
20 feet container can hold 3360 pcs
40 feet container can hold 6720 pcs



MF10a



MF10b

MF10a/MF10b
Body fat and Hydration % differential resolution:0.1%
Memory: 8 persons
Body fat measure range: 4.0% - 45%
Body hydration measure range: 37.8%-66%
Max. weight capacity: 150 kg/330 lb/24stones
Min. effective at: 2.0kg/4.4lb
Division: 100 g / 0.2 lb
Display screen:76 x 38 mm
User modes: Adult, Child (age 10-100)
Power: 1x9V Alkaline Battery (Not included)
Product Dimension:32 x 35 x 4.2 CM
Color Box Dimension:39 x 34.8 x 5.7cm
Packing:5 PCS/CTN
Master Carton Dimension:40.5 x 36.5 x 30.5 cm
Master Carton N. W.:12.2 KG
Master Carton G. W.:14.5 KG
20 feet container can hold:2940 PCS
40 feet container can hold:5880 PCS



MF11a



MF11b





MF12a



MF12b



MF12c

MF11a/MF11b
Bodyfat and Hydration % differential resolution:0.1%
Memory: 8 persons
Body fat measure range: 4.0% - 45%
Body hydration measure range: 37.8%-66%
Max. weight capacity: 150kg/330lb/24stone
Min. effective at: 2.0kg/4.4lb
Division: 100g/0.2lb
Display screen:95 x 52.5mm
User modes: Adult, Child (age 10-99)
Power: 1x9V Alkaline Battery (Not included)
Product Dimension:31.7 x 31.2 x 4.8 cm
Color Box Dimension:35.6 x 34.7 x 6.5 cm
Packing:5 PCS/CTN
Master Carton Dimension:38 x 36.5 x 35 cm
Master Carton N. W.:11.5 KG
Master Carton G. W.:14.1 KG
20 feet container can hold:2700 PCS
40 feet container can hold:5580 PCS

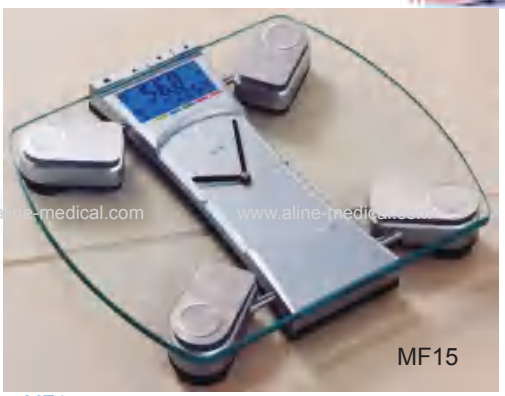
MF12a/MF12b/MF12c
Body fat and Hydration % differential resolution:0.1%
Memory: 8 persons
Body fat measure range: 4.0% - 45%
Body hydration measure range: 37.8%-66%
Max. weight capacity: 150 kg/330 lb/24stone
Min. effective at: 2.0kg/4.4lb
Division: 100 g / 0.2 lb
Display screen:76 x 38 mm
User modes: Adult, Child (age 10-99)
Power: 1x9V Alkaline Battery (Not included)
Product Dimension:29.2 X 31.1 X 4.3 cm
Color Box Dimension:35.5 X 32.2 X 7.1 cm
Packing:5 PCS/CTN
Master Carton Dimension:40.5 x 37.5 x 36.5 cm
Master Carton N. W.:10.2 KG
Master Carton G. W.:13.2 KG
20 feet container can hold:2520 PCS
40 feet container can hold:5040 PCS



MF13



MF14



MF15

MF13
Max.capacity:150kg(330lb/24 stone)
Division graduation:100g(0.2lb)
Body fat,Body hydration
Memory:12 users
Body muscle,Auto on
LCD size:83x43cm
Lithium cell:2xCR2032
Indicators
Dimensions of the scale:31.7x32.9x2.8cm
Dimensions of colour box:36.7x34.7x4.3cm
Packing volume:39x37x24cm 5 PCS/CTN
N. W.:10.5 KG G. W.:12.8 KG
20 feet container can hold 3780 PCS
40 feet container can hold 7830 PCS


MF14
Max.capacity:150kg(330lb/24 stone)
Division graduation:100g(0.2lb)
Body fat,Body hydration
Memory:12 users
Kcal:recommend,6-color LCD,Auto on
LCD size:83x43cm
Battery:1pc(excluded)
Indicators
Dimensions of the scale:34x33.7x4.75cm
Dimensions of colour box:38x36x7cm
Packing volume:39.8x37.8x36.9cm 5 PCS/CTN
N. W.:6.9 KG G. W.:9.2 KG
20 feet container can hold 2520 PCS
40 feet container can hold 5220 PCS

MF15
Max.capacity:150kg(330lb/24 stone)
Division graduation:100g(0.2lb)
Body fat,Body hydration
Memory:12 users
Kcal:recommend,6-color LCD,Auto on
LCD size:83x43cm
Battery:5pcs(excluded)
Indicators,Real time clock
Dimensions of the scale:35x31.3x3.96cm
Dimensions of colour box:39x34.8x6.5cm
Packing volume:40.5x36.5x34cm 5 PCS/CTN
N. W.:12.2 KG G. W.:14.5 KG
20 feet container can hold 2940 PCS
40 feet container can hold 5880 PCS

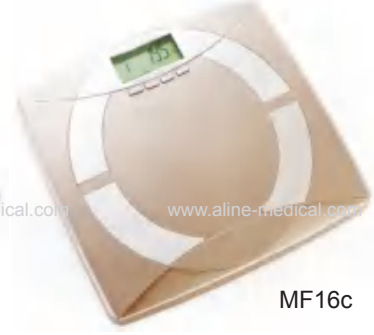




MF16a



MF16b

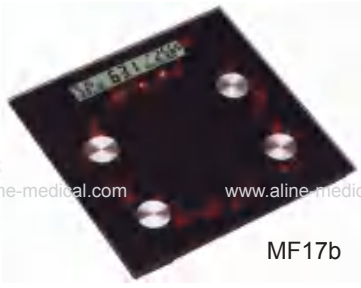


MF16c

MF16a/MF16b/MF16c
Max.capacity:150kg(330lb/24 stone)
Division graduation:100g(0.2lb)
Body fat,Body hydration
Memory:12 users
Body muscle,Tap-on
LCD size:83x43cm
Battery:1pc(excluded)
Indicators
Dimensions of the scale:31x29.3x4.5cm
Dimensions of colour box:35.5x32.2x7.1cm
Packing volume:37.8x33.8x38cm
5 PCS/CTN
N. W.:6.0 KG G. W.:8.4 KG
20 feet container can hold 3060 PCS
40 feet container can hold 6120 PCS



MF17a



MF17b



MF17c

MF17/MF18
Large stainless steel platform
Max.capacity:150kg(330lb/24 stone)
Division graduation:100g(0.2lb)
Body fat,Body hydration
Memory:12 users
Body muscle,Auto on
LCD size:160x30cm
Lithium cell:2xCR2032
Indicators
Dimensions of the scale:30x31.2x2.1cm
Dimensions of colour box:35.2x33.0x4.4cm
Packing volume:36.5x34.5x23.5cm
5 PCS/CTN
N. W.:8.5 KG G. W.:10.2 KG
20 feet container can hold 4800 PCS
40 feet container can hold 9900 PCS



MF18a



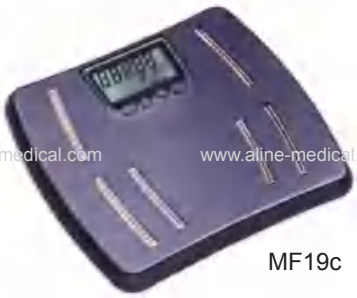
MF18b



MF18c


MF19a


MF19b


MF19c


MF19d

MF19a/MF19b/MF19c/MF19d
Max.capacity:150kg(330lb/24 stone)
Division graduation:100g(0.2lb)
Body fat,Body hydration
Memory:8 users
Backlight:blue(148h),Tap-on
LCD size:95x52.5cm
Battery:1pc(excluded),Indicators
Dimensions of the scale:33.3x29.6x4.0cm
Dimensions of colour box:36.5x32.7x7.1cm
Packing volume:38.8x34.3x38.0cm 5 PCS/CTN
N. W.:7.0 KG G. W.:9.6 KG
20 feet container can hold 2760 PCS
40 feet container can hold 5700 PCS


MF20

MF20 body fat scale
39 X35 X3.7
1pc/color box, 6pcs/carton
carton size: 43.5 x39.3 x37.5cm
N.W.: 13.8kg G.W.: 16.6kg
Body fat/hydration monitor scale
Equipped with high precision sensors.
8mm toughened glass
Bioelectrical Impedance Analysis (BIA) technology for body fat and body water measurements
10 memories (stores 10 users' data)
Capacity: 150kg Division: 100g
Auto zero resetting and auto off
Overload / Low power indicator
power: 2xCR2032 lithium battery


MF21

MF21 Body fat scale
30.2 X31.2 X3.4
1pc/color box, 6pcs/carton
carton size: 34.5 x35.5 x32.5cm
N.W.:10.2kg G.W.: 12.5kg
Body fat/hydration monitor scale
Equipped with high precision sensors.
8mm toughened glass
Bioelectrical Impedance Analysis (BIA) technology for body fat and body water measurements
10 memories (stores 10 users' data)
Capacity: 150kg Division: 100g
Auto zero resetting and auto off
Overload / Low power indicator
power: 2xCR2032 lithium battery


MF22

MF22 Body fat scale
34.5 X 33 X 5.8
1pc/color box, 6pcs/carton
carton size: 38.3 x38 x42.5cm
N.W.: 14kg G.W.: 16.8kg
Body fat/hydration monitor scale
Equipped with high precision sensors.
7mm toughened glass
Bioelectrical Impedance Analysis (BIA) technology for body fat and body water measurements
10 memories (stores 10 users' data)
Capacity: 150kg Division: 100g
Auto zero resetting and auto off
Overload / Low power indicator
power:1x9v battery


MF23


MF24

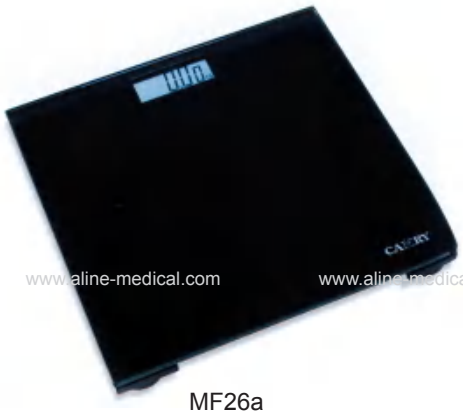

MF25

MF23 Body fat scale
32 x 35 x 3.8(5.4cm)
1pc/color box, 4pcs/carton
carton size: 38 x 39.7 x 41.6cm
N.W.: 12 kg G.W.: 12.8 kg
Equipped with high precision "strain gauge" sensor. Tempered safety plate glass platform, capacity: 5kg-150kg/180kg, division: 100g, LCD display, step-on switch, automatic zero resetting, automatic switch off, overload indicator, low battery indicator, operated by AA battery. TEST ENTRAILS FAT, P1-P12: 12 persons data memory, P0 can show weight data but no memory. BODY FAT+ WAER+WEIGHT+BMI+BODY BONE+BODY MUSTLE+KCAL+ATHLETE MODE TEST ENTRAILS FAT, 12 person data memory

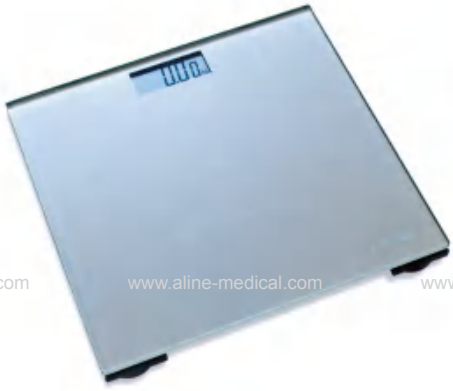
MF24 Butterfly patent body fat scale
32.5cmDia. X 4cmH
1pc/color box, 10pcs/carton
arton size: 68.5 x 36 x 37cm
N.W.: 20kg G.W.: 22kg
Artistic, vivid,strong visual enjoy
Equipped with high precision sensors.
8mm toughened glass
Bioelectrical Impedance Analysis (BIA) technology for body fat muscle, bone and body water measurements
10 memories (stores 10 users' data)
Capacity: 200kg Division: 100g
Auto zero resetting and auto off
Overload / Low power indicator
power: 2xCR2032 lithium battery

MF25 Super Slim Body Fat Scale
31 x 32.5 x 2.5
1pc/color box, 6pcs/carton
Carton size: 36.2x33.5x38cm
N.W.: 14.2kg G.W.: 15kg
Four individual high precision stain gauge sensors
Capacity: 150kgs or 180KGS.
Graduation: 100g or 0.2lb, 0.1% body fat
KG/LB/ST switch
Automatically power off
BODY FAT + WATER + WEIGHT
6mm super tempered glass platform
Data memory for up to 10 persons
2×CR2032 batteries included
ultrathin: only 2.5cm thickness

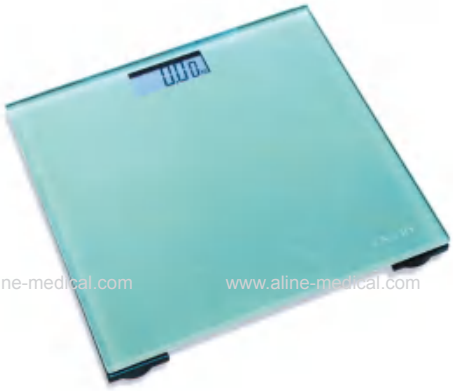
GLASS ELECTRONIC PERSONAL SCALE



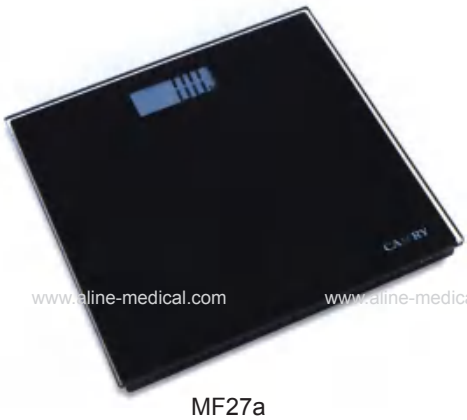
MF26a



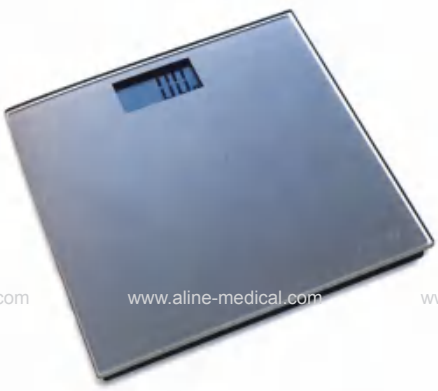
MF26b



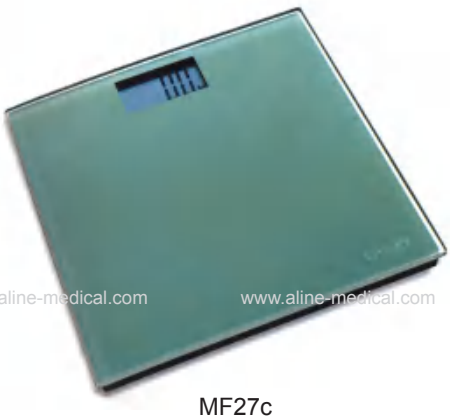
MF26c



MF27a



MF27b



MF27c




MF26a/MF26b/MF26c
Equipped with 4 high precision strain gauge sensors system
8mm tempered safety glass platform
Capacity:180kg(400lb/28stone)
Division:50g(0.1lb)
1.0”(25mm)LCD DIGITS
Auto zero-auto off
Low battery/over load indication
Power: 1pc X 3V lithium cell (CR 2032)
Product Dimension: 30 x 31.2 X 3.8 CM
Inner Pack Descr iption: Four Color Inner Box
Master Carton Dimension: 37 x 34 x 30 cm 5pcs/ctn
N. W.: 11 KG G. W.: 12.7 KG
20 feet container can hold: 3360 PCS
40 feet container can hold: 7140 PCS

MF27a/MF27b/MF27c
Equipped with 4 high precision strain gauge sensors system 8mm tempered safety glass plafform
Capacity:180kg(400lb/28stone)
1.5”(38mm) LCD digits
Low battery/over load indication
Power:1pcx3v lithium cell(cr2032)
Dimensions of the scale:31.2x30x3.8cm
Packing volume:36.2x35.5x31.8cm 5pcs/ctn
N.W.:11.3KG G.W:13.5KG
20 feet container can hold 3360pcs
40 feet container can hold 6720pcs



MF28a




MF28b



MF28c

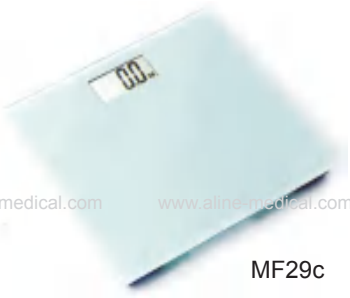
MF28a/MF28b/MF28c
8mm tempered glass platform
Capacity:180kg(400lb/28 stone)
Division:100g/0.2lb
1.2”(30mm)LCD digits
Auto on
Power:1x3V lithium cell(CR2032)
Dimensions of the scale:30x31.2x2.3cm
Dimensions of colour box:35.2x33.0x4.4cm
Packing volume:36.5x35x23.5cm 5 PCS/CTN
N. W.:10.6 KG G. W.:12.3 KG
20 feet container can hold 4320 PCS
40 feet container can hold 8910 PCS



MF29a

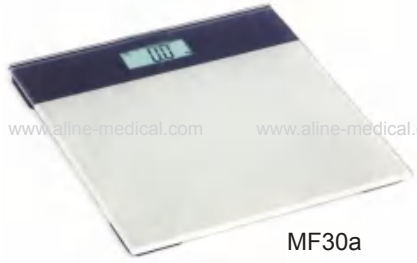


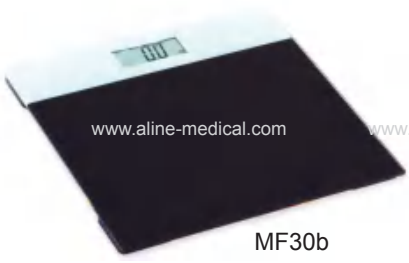
MF29b

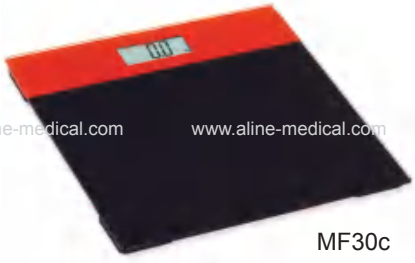


MF29c

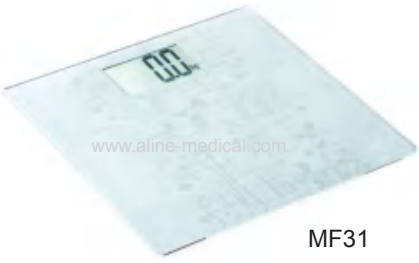
MF29a/MF29b/MF29c
8mm tempered glass platform
Capacity:180kg(400lb/28 stone)
Division:100g/0.2lb
1.5”(38mm)LCD digits
Auto on
Power:1x3V lithium cell(CR2032)
Dimensions of the scale:30x31.2x2.3cm
Dimensions of colour box:35.2x33.0x4.4cm
Packing volume:36.5x35x23.5cm 5 PCS/CTN
N. W.:10.6 KG G. W.:12.3 KG
20 feet container can hold 4320 PCS
40 feet container can hold 8910 PCS


MF30a


MF30b

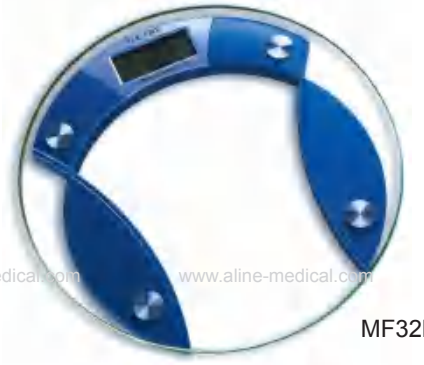

MF30c

MF30a/MF30b/MF30c
6mm tempered glass platform
Division:100g/0.2lb
Auto on
Low battery/over load indication
Capacity:150kg(330lb/24 stone)
1.0”(25mm)LCD digits
Power:1x3V lithium cell(CR2032)
Dimensions of the scale:30.2x30.2x2.1cm
Dimensions of colour box:34.2x33.0x4.4cm
Packing volume:35x34x23.5cm 5 PCS/CTN
N. W.:8.0 KG G. W.:9.6 KG
20 feet container can hold 4320 PCS
40 feet container can hold 8910 PCS


MF31

MF31
8mm tempered glass platform
Division:100g/0.2lb
Auto on
Low battery/over load indication
Capacity:180kg(400lb)
2.0”(50mm)LCD digits
Power:1x3V lithium cell(CR2032)
Dimensions of the scale:30x31.2x2.3cm
Dimensions of colour box:35.2x33.0x4.4cm
Packing volume:36.5x35x23.5cm 5 PCS/CTN
N. W.:10.6 KG G. W.:12.3 KG
20 feet container can hold 4320 PCS
40 feet container can hold 8910 PCS


MF32a


MF32b

MF32a/MF32b
Equipped with 4 high precision strain gauge sensors system 8mm tempered safety glass plafform
Capacity:180kg(400lb/28stone)
Division:100g/0.2lb
1.0”(25mm) LCD digits
Low battery/over load indication
Power:1pcx3v lithium cell(cr2032)
Dimensions of the scale:Φ33x4cm
Packing volume:38.5x35.5x29.5cm 5pcs/ctn
N.W.:10KG G.W:12KG
20 feet container can hold 3360pcs
40 feet container can hold 6720pcs


MF33a


MF33b

MF33a/MF33b
Equipped with 4 high precision strain gauge sensors system 8mm tempered safety glass platform
Capacity:180kg(400lb/28stone)
Division:100g/0.2lb
1.2”(30.4mm) LCD digits
Low battery/over load indication
Power:1pcx3v lithium cell(cr2032)
Dimensions of the scale:31.2x30x3.8cm
Packing volume:36.2x35.5x31.8cm 5pcs/ctn
N.W.:11 KG G.W:12.9KG
20 feet container can hold 3360pcs
40 feet container can hold 6720pcs


MF34a


MF34b


MF34c

MF34a/MF34b/MF34c
Equipped with 4 high precision strain gauge sensors system 8mm tempered safety glass platform
Capacity:180kg(400lb/28stone)
Division:100g/0.2lb
1.2”(30mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale:30x31.2x4.2cm
Packing volume:38.5x35x34cm 5pcs/ctn
N.W.:10.5KG G.W:12.9KG
20 feet container can hold 2760pcs
40 feet container can hold 5760pcs



MF35a



MF35b








MF36a



MF36b



MF37a

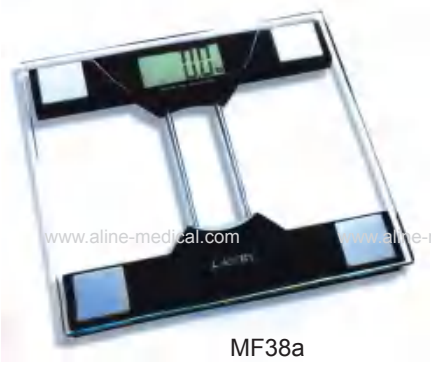


MF37b

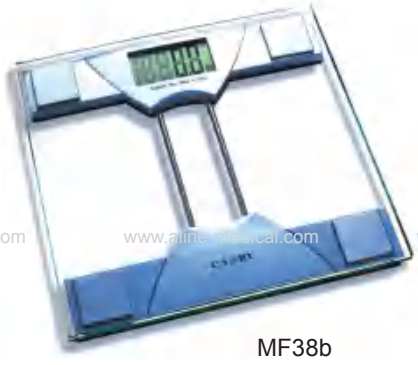
MF35a/MF35b
Equipped with 4 high precision strain gauge sensors system 8mm tempered safety glass platform
Capacity:180kg(400lb/28stone)
Division:100g/0.2lb
0.8”(20mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:2 PCS x1.5V AAA batteries (not included) for read out display
4PCSx1.5V AAA batteries(not included)for scale unit
Dimensions of the scale:30x31.2x4.5cm
Packing volume:36.8x35x36.3cm 5PCS/CTN
N.W.:12KG G.W:14.6KG
20 feet container can hold 2880pcs
40 feet container can hold 5940pcs

MF36a/MF36b
Equipped with 4 high precision strain gauge sensors system 6mm tempered safety glass platform
Capacity:150kg(330lb/28stone)
Division:100g/0.2lb
0.8”(20mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale:30.2x30.2x3.8cm
Packing volume:36.5x34.8x30.5cm 5pcs/ctn
N.W.:8.5KG G.W:11.2KG
20 feet container can hold 3360pcs
40 feet container can hold 6930pcs

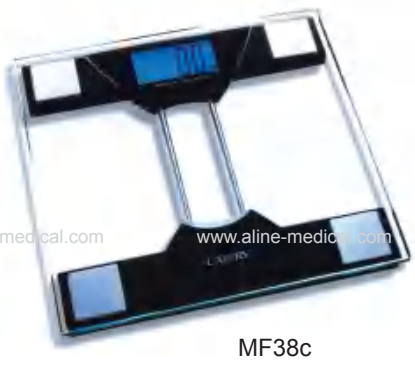
MF37a/MF37b
Equipped with 4 high precision strain gauge sensors system 8mm tempered safety glass platform
Capacity:180kg(400lb/28stone)
Division:100g/0.2lb
1.2”(30mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale:30x31.2x4cm
Packing volume:36.2x35.5x31.8cm 5pcs/ctn
N.W.:10.8KG G.W:13KG
20 feet container can hold 3360pcs
40 feet container can hold 6720pcs



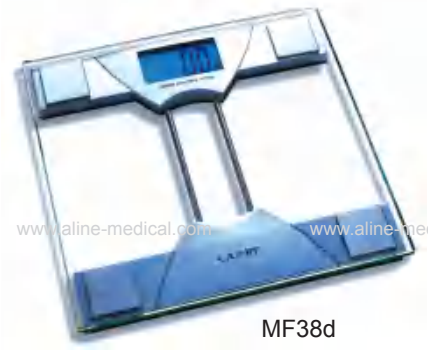
MF38a



MF38b



MF38c



MF38d



MF38a/MF38b/MF38c/MF38d
Equipped with 4 high precision strain gauge sensors system
8mm tempered safety glass platform
Capacity:180kg(400lb/28stone)
Division:100g/0.2lb
1.5”(38mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032) for MF38a/MF38b
2pcsx1.5V AAA batteries(not included) MF38c/MF38d
Dimensions of the scale:30x31.2x3.8cm
Packing volume:36.2x35.5x31.8cm 5pcs/ctn
N.W.:11.3KG G.W:13.5KG
20 feet container can hold 3360pcs
40 feet container can hold 6720pcs


MF39a


MF39b


MF39c

MF39a/MF39b /MF39c
Equipped with 4 high precision strain gauge sensors system 8mm tempered safety glass platform
Capacity:180kg(400lb/28stone)
Division:50g/0.1lb
1.0”(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale:30x31.2x3.8cm
Packing volume:37x34x30cm 5pcs/ctn
N.W.:11 KG G.W:12.7KG
20 feet container can hold 3360pcs
40 feet container can hold 7140pcs


MF40a


MF40b

MF40a/MF40b
Equipped with 4 high precision strain gauge sensors system 6mm tempered safety glass platform
Capacity:150kg(330lb)
Division:100g/0.2lb
0.8”(21mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale:30.2x30.2x4cm
Packing volume:37.6x36.8x31cm 5pcs/ctn
N.W.:7.6 KG G.W:10.3KG
20 feet container can hold 3150pcs
40 feet container can hold 6720pcs


MF41a


MF41b


MF41c

MF41a/MF41b/MF41c
Equipped with 4 high precision strain gauge sensors system 8mm tempered safety glass platform
Capacity:180kg(400lb/28stone)
Division:100g/0.2lb
1.0”(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale:Φ33x3.7cm
Packing volume:38.5x35.5x29.5cm 5pcs/ctn
N.W.:9.5 KG G.W:11.7KG
20 feet container can hold 3360pcs
40 feet container can hold 6720pcs


MF42a


MF42b

MF42a/MF42b
Equipped with 4 high precision strain gauge sensors system 6mm tempered safety glass platform
Capacity:150kg(330lb)
Division:100g/0.2lb
0.8”(21mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale: Φ33x4.1cm
Packing volume:37.8x37.5x33.8cm 5pcs/ctn
N.W.:7.6 KG G.W:10KG
20 feet container can hold 3150pcs
40 feet container can hold 6300pcs


MF43a


MF43b

MF43a/MF43 b
Equipped with 4 high precision strain gauge sensors system 8mm tempered safety glass platform
Capacity:150kg(330lb/24stone)
Division:100g/0.2lb
1.0”(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale: Φ33x3.5cm
Packing volume:38x37x29cm 5pcs/ctn
N.W.:9.8 KG G.W:12.1KG
20 feet container can hold 3600pcs
40 feet container can hold 7680pcs



MF44

MF44
Equipped with 4 high precision strain gauge sensors system 8mm tempered safety glass platform
Capacity:150kg(330lb)
Division:100g/0.2lb
1.0”(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale: 30x31.2x5cm
Packing volume:39.5x35.5x36cm
5pcs/ctn
N.W.:10.9 KG G.W:13.4KG
20 feet container can hold 2520pcs
40 feet container can hold 5220pcs


MF45a/MF45b/MF46a/MF46b
Equipped with 4 high precision strain gauge sensors system 8m tempered safety glass platform
Capacity:150kg(330lb/24stone)
Division:100g/0.2lb
1.0”(25 mm)LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)

MF45a/MF45b
Dimensions of the scale: 35x33.2x7.5cm
Packing volume:41x40.5x33cm
3PCS/CTN
N.W.:7.2KG G.W:9.8kg
20 feet container can hold 1470pcs
40 feet container can hold 3045pcs

MF46a/MF46b
Dimensions of the scale: 30x31.2x4.2cm
Packing volume: 38.5x35x35.5cm 5pcs/ctn
N.W.:10.9KG G.W:13.5kg
20 feet container can hold-2700pcs
40 feet container can hold 5580pcs



MF45a



MF45b



MF46a



MF46b



MF47a



MF47b



MF47c



MF48a



MF48b

MF47/MF48
Equipped with 4 high precision strain gauge sensors system
8mm tempered safety glass platform
Capacity:150kg(330lb/24stone)
Division:100g/0.2lb
1.0”(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)

MF47a/MF47b/MF47c
Dimensions of the scale: Φ33x41cm
Packing volume:39.8x37x32.5CM 5PCS/CTN
N.W.:10.1KG GW:12.5KG
20 feet container can hold 2940PCS
40 feet container can hold 6090PCS

MF48a/MF48b
Dimensions of the scale: 34x30x3.5cm
Packing volume:39x34x29cm 5pcs/ctn
N.W.:9.4 KG G.W:11.3KG
20 feet container can hold 3840pcs
40 feet container can hold 8160pcs



MF49a



MF49b



MF49c

MF49a/MF49b/MF49c
8mm tempered glass platform
Capacity:180kg(400lb/28 stone)
Division:100g/0.2lb
1.5”(38mm)LCD digits
Auto on
Power:1x3V lithium cell(CR2032) MF49a
Blue LCD backlight,2x1.5V AAA(not included)9012h
Dimensions of the scale:Φ33x3.6cm
Dimensions of colour box:37.0x36.6x5.4cm
Packing volume:38.0x37.5x28.5cm 5 PCS/CTN
N. W.:10.1 KG G. W.:12.3 KG
20 feet container can hold 3600 PCS
40 feet container can hold 7440 PCS


MF50a


MF50b


MF50c


MF50d

MF50a/MF50b/MF50c/MF50d
Equipped with 4 high precision strain gauge sensors system 8mm tempered safety glass platform
Capacity:150kg(330lb/24 STONE)
Division:100g/0.2lb
1.0”(25mm) LCD digits
Blue backlight (MF50d)
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
MF50a/MF50b/MF50c
2pcs1.5V AAAbatteries (not included)MF50d
Dimensions of the scale: 30x31.2x4.2CM
Packing volume:38.5x35x34.5cm 5pcs/ctn
N.W.:11.1 KG G.W:13.1KG
20 feet container can hold 2760pcs
40 feet container can hold 5760pcs


MF51a


MF51b

MF51a/MF51b
Sturdy safety glass 10mm thick
Precision 4 sensor technology
Mx load-bearing capacity 150kg or 180kg
Weight display:kg,lb or st-lb
Scale:0.1kg/0.2lb
Including 4 batteries
Easy to use
Robust design
Platter size:355x355mm
Operation:4dry batteries
Type R03PAAA
Measuring range:2kg to 180kg in 100g gradations


MF52

MF52
Equipped with a high precision strain gauge sensors system 10mm tempered safety glass platform
Capacity:150kg(330lb/24 stone)
Division:100g/0.2lb
1.0”(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale: Φ35.5x7.2cm
Packing volume:43.5x40x33.5cm 3pcs/ctn
N.W.:16.5 KG G.W:19.1KG
20 feet container can hold 1470pcs
40 feet container can hold 3045pcs


MF53

MF53
Equipped with a high precision strain gauge sensors system 10mm tempered safety glass platform
Capacity:180kg(400lb/28 stone)
White LCD backlight
Division:100g/0.2lb
1.2”(30.4mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale: Φ35.5x7.25cm
Packing volume:43.5x40x33.5cm 3pcs/ctn
N.W.:15.6KG G.W:18.5KG
20 feet container can hold 1470pcs
40 feet container can hold 3045pcs

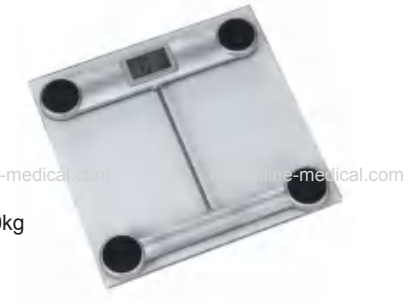

MF54a


MF54b

MF54a/MF54b
8mm tempered glass platform
Capacity:180kg(400lb/28 stone)
Division:100g/0.2lb
1.0”(25mm)LCD digits
Auto on
Power:1x3V lithium cell(CR2032) for scale
1x1.5V AA(not included)for clock
Dimensions of the scale:Φ33x4.35cm
Dimensions of colour box:36.3x35.7x6.3cm
Packing volume:38.3x37.4x34.9cm 5 PCS/CTN
N. W.:11 KG G. W.:13 KG
20 feet container can hold 2700 PCS
40 feet container can hold 5400 PCS


MF55

MF55
Capacity: 150kg
Division:100g


MF56

MF56
30.2 X30.2 X3.4,1pc/color box, 8pcs/carton
carton size: 35 x 35 x44cm
N.W.: 13.2kg G.W.: 16kg
Four individual high precision stain gauge sensors
Capacity: 180kg
Graduation: 100g or 0.2lb
KG/LB/ST switch
Automatically power off
Body weight
6mm super tempered glass platform
LCD sizse:7.3x3 mm
1×CR2032 batteries included
Packaging: Giftbox



MF57

MF57
Capacity: 180kg
Division:100g
Size:302x302x34mm
Color available:yellow,silvery,blue
Packing size:345x345x435mm/8pcs
N.W.:15.5KG G.W.:12.8KG



MF58

MF58
30.8 x 30 x 3.8,1pc/color box, 5pcs/carton
carton size: 35 x 31.5 x 35.5cm
N.W.: 10kg G.W.: 10.8kg
Four individual high precision stain gauge sensors
Capacity: 150kgs
Graduation: 100g or 0.2lb
KG/LB/ST switch
Automatically power off
Body weight
6mm super tempered glass platform
2×CR2032 batteries included
Packaging: Giftbox




MF59

MF59 bathroom scale
30.8 x 30 x 3.8
1pc/color box, 5pcs/carton
carton size: 35 x 31.5 x 35.5cm
N.W.: 9.8kg G.W.: 10.6kg
Four individual high precision stain gauge sensors
Capacity: 150kgs
Graduation: 100g or 0.2lb
KG/LB/ST switch
Automatically power off
Body weight
6mm super tempered glass platform
2×CR2032 batteries included
Packaging: Giftbox



MF60

MF60 bathroom scale
29 x 28.8 x 3.5
1pc/color box, 5pcs/carton
carton size: 33 x32 x 33.2cm
N.W.: 8.9kg G.W.: 9.5kg
Four individual high precision stain gauge sensors
Capacity: 150kgs
Graduation: 100g or 0.2lb
KG/LB/ST switch
Automatically power off
Body weight
6mm super tempered glass platform
1×CR2032 batteries included
Packaging: Giftbox



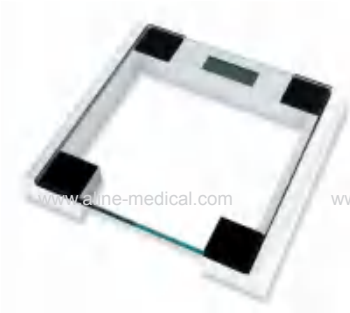
MF61

MF61 bathroom scale
29 x 28.8 x 3.5
1pc/color box, 5pcs/carton
carton size: 35.5x34.5x33cm
N.W.: 8.9kg G.W.: 9.5kg
Four individual high precision stain gauge sensors
Capacity: 150kgs
Graduation: 100g or 0.2lb
KG/LB/ST switch
Automatically power off
Body weight
6mm super tempered glass platform
1×CR2032 batteries included
Packaging: Giftbox



MF62

MF62 Bathroom scale - ultra slim
30.2 X30.2 X3.4
1pc/color box, 6pcs/carton
carton size: 34.5 x 34.3 x33.5cm
N.W.: 12.1kg G.W.: 14.5kg
Four individual high precision stain gauge sensors
Capacity: 150kgs or 180kg
Graduation: 100g or 0.2lb
KG/LB/ST switch
Automatically power off
Body weight
6mm super tempered glass platform
LCD sizse:7.3x3 mm
2×CR2032 batteries included
Packaging: Giftbox




MF63

MF63 bathroom scale(water proof platform)
34.2 x 33.5 x 6.6
1pc/color box, 4pcs/carton
carton size: 35.5x34.7x35cm
N.W.: 8kg G.W.: 9.8kg
Equipped with high precision “strain-gauge” sensor
Tempered safety plate glass platform
Capacity:5KG-150kg/180kg/200kg
Division:100g
LCD DISPLAY
Automatic switch off
Overload indicator
Low battery indicator
Powered by: Cr2032 lithium batteries



MF64

MF64 Bathroom scale - ultra slim
35cmDia. X 2cmH
1pc/color box, 6pcs/carton
carton size: 40x29.2x39.6cm
N.W.: 11.4kg G.W.: 12kg
Four individual high precision stain gauge sensors
Capacity: 150kgs
Graduation: 100g or 0.2lb
KG/LB/ST switch
Automatically power off
Body weight
6mm super tempered glass platform
LCD size:7.3x3 mm
1×CR2032 battery included
Packaging: Giftbox
ultrathin only :2cm thickness



MF65

MF65 Bathroom scale - ultra slim
31 x 30 x 2cmH
1pc/color box, 6pcs/carton
carton size: 36.2x29.2x36.2cm
N.W.: 10.7kg G.W.: 12kg
Four individual high precision stain gauge sensors
Capacity: 150kgs
Graduation: 100g or 0.2lb
KG/LB/ST switch
Automatically power off
Body weight
6mm super tempered glass platform
LCD size:7.3x3 mm
1×CR2032 battery included
Packaging: Giftbox
ultrathin only 2cm thicknesss



MF66

MF66 Digital speaking scale
27 x 29.5 x 3.8,1pc/color box, 5pcs/carton
carton size: 47 x 35 x 39cm
N.W.: 14.5kg G.W.: 16kg
Four individual high precision stain gauge sensors
Capacity: 150kgs (200kgs)
Graduation: 100g or 0.2lb
KG/LB/ST switch
Automatically power off
Body weight
7.3mm super tempered glass platform
English sound for weight
4xAA batteries,not included
Packaging: Giftbox
Crystal Clear and Clean. Scratch resistant



MF67

MF67 Digital speaking scale
28 x 30 x 4.5cmH
1pc/color box, 5pcs/carton
carton size: 46 x 35 x 39cm
N.W.: 13.2kg G.W.: 15kg
Four individual high precision stain gauge sensors
Capacity: 150kgs (200kgs)
Graduation: 100g or 0.2lb,KG/LB/ST switch
Automatically power off,Body weight
7.3mm super tempered glass platform
English sound for weight
4xAA batteries,not included,Packaging: Giftbox
Stylish and Sharp Image: Eye Catching Design with Super-Large LCD 60x30mm and blue back-light. Crystal Clear and Clean. Scratch resistant



MF68

MF68 health scale- patent
30 x 30 x 4
1pc/color box, 10pcs/carton
carton size: 68.5 x 36 x 37cm
N.W.: 20kg G.W.: 22kg
Fashionable ,lively
Equipped with high precision load sensor
LCD display (85x32mm)
High standard ABS shell
Capacity: 150Kg (330lb) Division: 100g
Weigh Directly (without vibration)
Overload / Low battery indicator
7.3mm toughened glass platform
power: 2xCR2032 li battery, step on scale, can continuous weight one by one.



MF69



MF70



MF71



MF72



MF73



MF74



MF75



MF76

MF69-MF72 Electronic health scale
KG/LB/ST switchable
Equipped with a high precision strain gauge sensor
10mm tempered safety glass platform
Capacity 150kg(330 lbs/24 stones)
Division 0.1kg(0.2 lb)
Auto zero-auto off
Low battery-over load indication
Power 6v/9v

MF73-MF75 Electronic health scale
KG/LB/ST switchable
Equipped with a high precision strain gauge sensor
10mm tempered safety glass platform
Capacity 150kg(330 lbs/24 stones)
Division 0.1kg(0.2 lb)
Auto zero-auto off
Low battery-over load indication
Power 9v

MF76 Electronic health scale
KG/LB/ST switchable
Equipped with a high precision strain gauge sensor
10mm tempered safety glass platform
Capacity 150kg(330 lbs/24 stones)
Division 0.1kg(0.2 lb)
Auto zero-auto off
Low battery-over load indication
Power 9v
Easy to read,Adjustable pole,Fashionable
Other functions same as our normal electronic healthy scale



MF77a



MF77b



MF77c

MF77 Electronic health scale
KG/LB/ST switchable
Equipped with a high precision strain gauge sensor
10mm tempered safety glass platform
Capacity 150kg(330 lbs/24 stones)
Division 0.1kg(0.2 lb)
Auto zero-auto off
Low battery-over load indication
Power 9v



MF78



MF79




MF80

MF78 Electronic health scale
KG/LB/ST switchable
Equipped with a high precision strain gauge sensor
Capacity 150kg(330 lbs/24 stones)
Division 0.1kg(0.2 lb)
Auto zero-auto off
Low battery-over load indication
Power 9v,Stainless steel

MF79/MF80 Body fat scale
Weight capacity:330 lb
Graduation:0.2 lb
Weighing units:lb/kg selectable
Body fat increments:0.1%
Memory function:stores up to 12 profiles
Large LCD display
Total operation keys:4
Total metal footplates:12




MF81a



MF81b



MF82a




MF82b

MF81/MF82 Electronic health scale
KG/LB/ST switchable
Equipped with a high precision strain gauge sensor
Capacity 150kg(330 lbs/24 stones)
Division 0.1kg(0.2 lb)
Auto zero-auto off
Low battery-over load indication
Power 9v



MF83


MF83 Electronic health scale
KG/LB/ST switchable
Equipped with a high precision strain gauge sensor
Capacity 150kg(330 lbs/24 stones)
Division 0.1kg(0.2 lb)
Auto zero-auto off
Low battery-over load indication
Power 9v



MF84a




MF84b




MF84c


MF84a/MF84b/MF84c
Equipped with high precision strain gauge sensors system
Capacity:150kg(330lb/24 stone)
Division:100g/0.2lb
1.0"(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale: 32x30x4.5cm
Packing volume:37.8x33.8x38cm 5pcs/ctn
N.W.:6KG G.W:9KG
20 feet container can hold 3060pcs
40 feet container can hold 6120pcs



MF85a




MF85b



MF85c

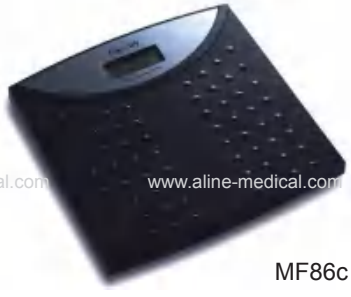
MF85a/MF85b/MF85c
Equipped with 4 high precision strain gauge sensors system
Capacity:150kg(330ib/24stone)
Division:100g/0.2lb
1.0"(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale: 31x30x4.5cm
Packing volume:37.8x33.8x38cm 5pcs/ctn
N.W.:6 KG G.W:8.2KG
20 feet container can hold 3060pcs
40 feet container can hold 6300pcs



MF86a

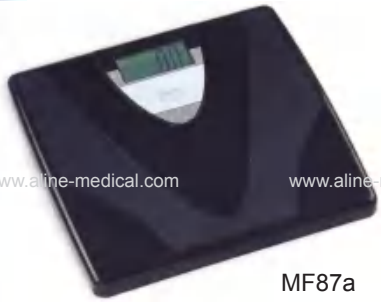


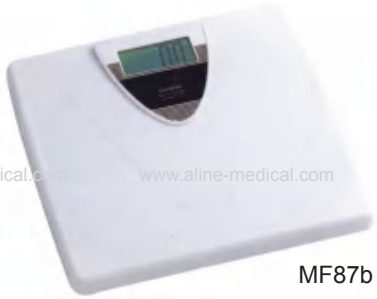
MF86b




MF86c

MF86a/MF86b/MF86c
Equipped with high precision strain gauge sensors system
Capacity:150kg(330lb/24 stone)
Division:100g/0.2lb
1.0"(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale: 30.1x30.8x4.6cm
Packing volume:37.8x33.8x38cm 5pcs/ctn
N.W.:6.6KG G.W:9KG
20 feet container can hold 3060pcs
40 feet container can hold 6120pcs


MF87a


MF87b

MF87a/MF87b
Capacity:150kg(330lb/24 stone)
Division:100g/0.2lb
1.2"(30mm)LCD digits
Auto on
Power:1x3V lithium cell(CR2032)
Dimensions of the scale:31x29x4.39cm
Packing volume:37.8x33.8x38cm 5 PCS/CTN
N. W.:6.2 KG G. W.:8.7 KG
20 feet container can hold 3060 PCS
40 feet container can hold 6120 PCS


MF88





MF88 Infrared wireless data transmission
Portable LCDremote control
Strain gauge sensor
Weighting modes:normal weighing &user memory
Memory :8 persons (each memory with 10 tracking records)
Goal setting &weight tracing function
Real time clock& weight tracing funtion
Capacity:250kg(550lb/39 stone)
Division:100g/0.2lb
Kb/ib stone convertible
Auto zero -auto off
Low batterypower and over load indication
Power:1pcx9volts battery(not included)\
2x1.5V AAAbatteries (not included)
Dimension of the scale:37.8x35x4cm
Packing volume:50x43x29.5cm 3pcs/ctn
N.W.:12.6KG G.W:15.1KG
20 feet container can hold1416pcs
40 feet container can hold 2952pcs



MF89a


MF89b


MF89a/MF89b
Equipped with 4 high precision strain gauge sensors system
Capacity:150kg(330lb/24 stone)
Division:100g/0.2lb
1.0"(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
MF89a
12mm nature marble platform
Dimensions of the scale:35x33x7.5cn
Packing volume:41x40.5x35.5cm
3pcs/ctn
N.W.:9.6KG G.W:12.3KG
20 feet container can hold 1260pcs
40 feet container can hold 2610pcs
MF89b
18mm nature wood platform
Dimensions of the scale:
35x33x7.5cm
Packing volume:
40x39.5x33cm 3pcs/ctn
N.W.:5.4KG G.W:7.9KG
20 feet comtainer can hold 1470pcs
40 feet container can hold 3045pcs


MF90a


MF90b


MF90c

MF90a/MF90b/MF90c
Equipped with 4high precision strain gauge sensors system
Capacity:150kg(330lb/24 stone)
Division:100g/0.2lb
1.0"(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale: 29x29x3.5cm
Packing volume:34.8x33.9x31.5cm 5pcs/ctn
N.W.:7.7KG G.W:9.5KG
20 feet container can hold 3360pcs
40 feet container can hold 7140pcs



MF91a



MF91b


MF91c


MF91a/MF91b/MF91c
Equipped with 4 high precision strain gauge sensors system
Capacity:150kg(330lb/24 stone)
Division:100g/0.2lb
1.1"(25.6mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale: 29.4x29x3.5cm
Packing volume:34.5x33x29.5cm 5pcs/ctn
N.W.:8.1KG G.W:10.2KG
20 feet container can hold 3920pcs
40 feet container can hold 8085pcs



MF92a



MF92b


MF92c


MF92a/MF92b/MF92c
Equipped with 4high precision strain gauge sensors system
Capacity:150kg(330lb/24 stone)
Division:100g/0.2lb
1.0"(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale: 29.5x29.1x4.3m
Packing volume:34.5x33.5x31cm 5pcs/ctn
N.W.:8.3KG G.W:10.4KG
20 feet container can hold 3920pcs
40 feet container can hold 8085pcs

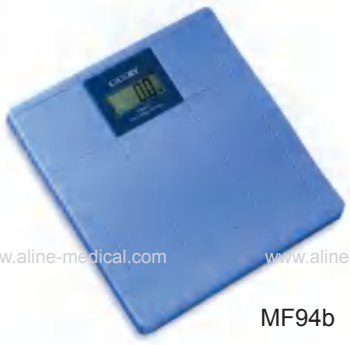

MF93a

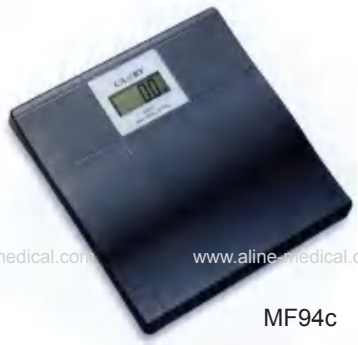

MF93b



MF93c


MF93a/MF93b/MF93c
Equipped with high precision strain gauge sensors system
Capacity:150kg(330lb/24 stone)
Division:100g/0.2lb
1.0"(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale: 32x29.6x5cm
Packing volume:35.5x33.5x31cm 5pcs/ctn
N.W.:12.1KG G.W:14.6KG
20 feet container can hold 3570pcs
40 feet container can hold 7140pcs


MF94a


MF94b


MF94c



MF94d

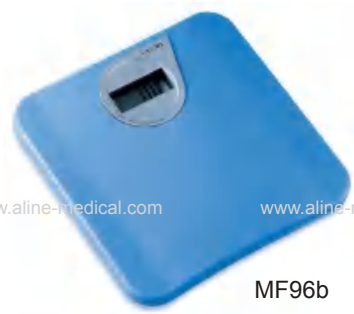

MF95a

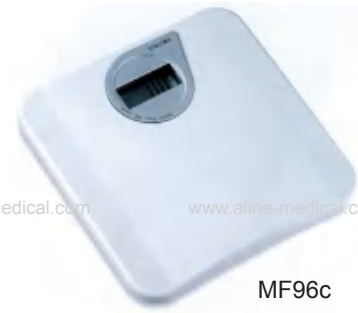

MF95b

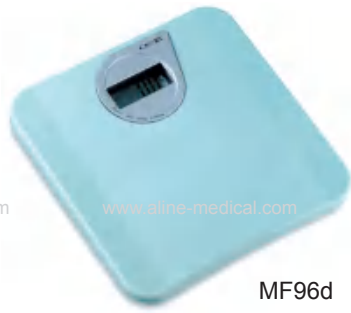
MF94a/MF94b/MF94c/MF94d
Equipped with high precision strain gauge sensors system
Capacity:150kg(330lb/24 stone)
Division:100g/0.2lb
1.0"(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale: 31.5x30.5x5.5cm
Packing volume:37.5x37x33.5cm 5pcs/ctn
N.W.:12.2KG G.W:15.2KG
20 feet container can hold 3150pcs
40 feet container can hold 6510pcs

MF95a/MF95b
Equipped with high precision strain gauge sensors system
Capacity:150kg(330lb/24 stone)
Division:100g/0.2lb
1.0"(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale: 31x30x5.3cm
Packing volume:35.5x34x34.5cm 5pcs/ctn
N.W.:11.8KG G.W:14.7KG
20 feet container can hold 3060pcs
40 feet container can hold 6120pcs



MF96a


MF96b


MF96c


MF96d

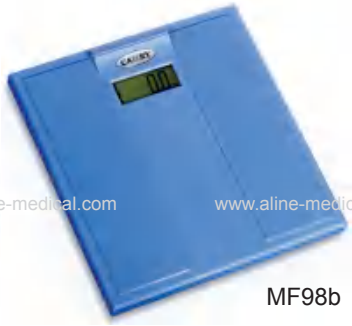

MF97a


MF97b

MF96a/MF96b/MF96c/MF96d
Capacity:120kg(260lb)
Division:0.5Kg/1lb
1.0"(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx9volts bottery(not included)
Dimensions of the scale: 29x28.7x6.4cm
Packing volume:63.5x33.5x36.5cm 10pcs/ctn
N.W.:17.7KG G.W:20.3KG
20 feet container can hold 3780pcs
40 feet container can hold 7560pcs

MF97a/MF97b
Equipped with high precision strain gauge sensors system
Capacity:150kg(330lb/24 stone)
Division:200g/0.5lb
0.7"(18mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx3v lithium cell (cr2032)
Dimensions of the scale: 27.4x27x4.4cm
Packing volume:34.5x30.5x26cm 5pcs/ctn
N.W.:9.7KG G.W:10.5KG
20 feet container can hold 5400pcs
40 feet container can hold 11295pcs


MF98a


MF98b


MF98c

MF98a/MF98b/MF98c
Capacity:120kg(260lb)
Division:0.5KG/1lb
1.0”(25mm) LCD digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx9volts battery(not included)
Dimensions of the scale: 28.8x27.6x6.6cm
Packing volume:60.5x34x37cm 10pcs/ctn
N.W.:17.5KG G.W:20KG
20 feet container can hold 3960pcs
40 feet container can hold 8160pcs

ELECTRONIC PERSONAL SCALE WITH LED


MF99a


MF99b


MF99c


MF99d


MF100a


MF100b

MF99a/MF99b/MF99c/MF99d
Capacity:120kg(260lb)
Division:0-99.5kg;0.5kg/1lb
100-120kg;1kg/1ib
0.8”(20mm) LED digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx9volts battery(not included)
Dimensions of the scale: 25.7x26.5x5.3cm
Packing volume:59.8x29.5x31.2cm 10pcs/ctn
N.W.:14.6KG G.W:17KG
20 feet container can hold 5320pcs
40 feet container can hold 10640pcs

MF100a/MF100b
Capacity:120kg(260lb)
Division:0-99.5kg;0.5kg/1lb
100-120kg;1kg/1lb
0.8”(20mm) LED digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx9volts battery(not included)
Dimensions of the scale: 31.5x28.5x6.3cm
Packing volume:70x34.8x32.5cm 10pcs/ctn
N.W.:17.2KG G.W:19.8KG
20 feet container can hold 3570pcs
40 feet container can hold 6930pcs


MF101a


MF101b


MF101c

MF101a/MF101b/MF101c
Capacity:120kg(260lb)
Division:0-99.5kg;0.5kg/1lb
100-120kg;1kg/1lb
0.8”(20mm) LED digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx9-volts battery(not included)
Dimensions of the scale: 28x29x5.8cm
Packing volume:32.2x31.3x49.7cm 8pcs/ctn
N.W.:13.5KG G.W:15KG
20 feet container can hold 4648pcs
40 feet container can hold 9576pcs


MF102a


MF102b


MF102c

MF102a/MF102b/MF102c
Capacity:120kg(260lb)
Division:0-99.5kg;0.5kg/1lb
100-120kg;1kg/1lb
0.8”(20mm) LED digits
Auto zero -auto off
Low battery/over load indication
Power:1pcx9volts battery(not included)
Dimensions of the scale: 28.8x27.8x6.3cm
Packing volume:69.3x31x34cm 10pcs/ctn
N.W.:17.1KG G.W:19.2KG
20 feet container can hold 4200pcs
40 feet container can hold 8890pcs

MECHANICAL PERSONAL SCALE



MF103



MF104a



MF104b

MF103
Capacity:130kg/300lb,Graduation:1000g/2lb
Dimensions of the scale: Φ35x8cm
Packing volume:43.3x40.5x35.2cm
3pcs/ctn
N.W.:10.8KG G.W:13.4KG
20 feet container can hold 1260pcs
40 feet container can hold 2610pcs

MF104a/MF104b
Capacity:130kg/300lb,Graduation:1000g/2lb
Dimensions of the scale:30.2x30.2x5.9cm
Packing volume:38.3x35x28.6cm 3pcs/ctn
N.W.:8.6KG G.W:10.4KG
20 feet container can hold 2304pcs
40 feet container can hold 4752pcs



MF105



MF106



MF107

MF105
Capacity:130kg/300lb
Graduation:1000g/2lb
Dimensions of the scale: 30x36x5.8cm
Packing volume:43.8x35x27.5cm 3pcs/ctn
N.W.:8.8KG G.W:10.9KG
20 feet container can hold 2016pcs
40 feet container can hold 4176pcs

MF106
Capacity:130kg/300lb
Graduation:1000g/2lb
Dimensions of the scale: 30.2x30.2x7.2cm
Packing volume:38.3x35.3x30.2cm 3pcs/ctn
N.W.:9.9KG G.W:11KG
20 feet container can hold 2016pcs
40 feet container can hold 4158pcs

MF107
Capacity:130kg/300lb
Graduation:1000g/2lb
Dimensions of the scale: Φ33x5.8cm
Packing volume:40.6x38x27.2cm 3pcs/ctn
N.W.:8.8KG G.W:11KG
20 feet container can hold 2016pcs
40 feet container can hold 4176pcs



MF108a



MF108b



MF108c



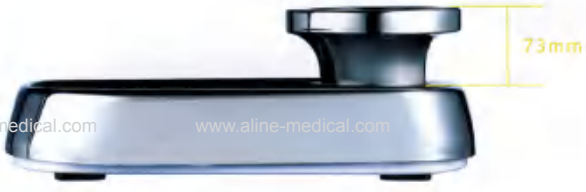
MF108d



MF109a

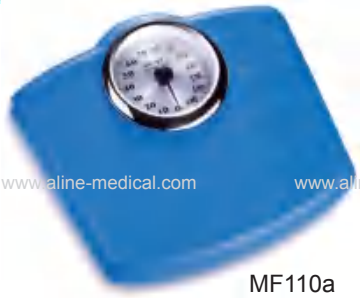


MF109b

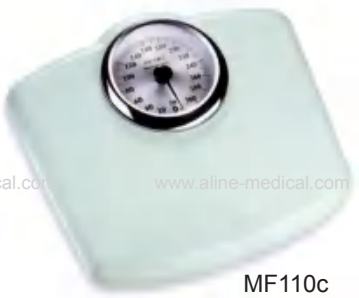


MF108
CHROME Plated Housing(MF95d)
Capacity:136kg/300lb
Graduation:500g/1lb
Dimensions of the scale: 43x28.5x8.3cm
Packing volume:50.3x33x32.5cm 3pcs/ctn
N.W.:9.2KG G.W:11.5KG
20 feet container can hold 1701pcs
40 feet container can hold 3381pcs

MF109
CHROME Plated Housing(MF96b)
Capacity:160kg/350lb
Graduation:1000g/2lb
Dimensions of the scale: 34.5x27.5x13cm
Packing volume:64.5x39.7x36.5cm 4pcs/ctn
N.W.:12.2KG G.W:15.1KG
20 feet container can hold 1224pcs
40 feet container can hold 2520pcs

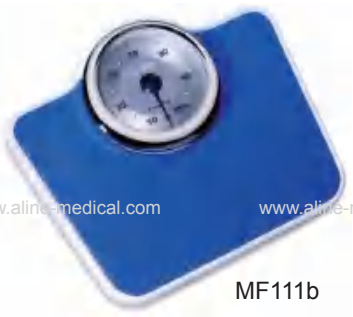

MF110a



MF110b


MF110c

MF110a/MF110b/MF110c
Capacity:150kg/330lb
Graduation:1000g/2lb
Dimensions of the scale:
38.6x34.5x6.8cm
Packing volume:43.8x39x41cm
5pcs/ctn
N.W.:14KG G.W:16.5KG
20 feet container can hold 1950pcs
40 feet container can hold 4050pcs


MF111a


MF111b


MF111c


MF111d


MF111e

MF111
CHROME Plated Housing
Capacity:136kg/300lb
Graduation:1000g/2lb
Dimensions of the scale: 34x38x7cm
Packing volume:40.2x37.5x34.2cm
5pcs/ctn
N.W.:12.6KG G.W:14.8KG
20 feet container can hold 2640pcs
40 feet container can hold 5460pcs


MF112a



MF112b


MF112c


MF112d


MF112e

MF112
Capacity:130kg/300lb
Graduation:1000g/2lb
Dimensions of the scale:
24.3x26.8x4.2cm
Packing volume:58x27.3x24.2cm
10pcs/ctn
N.W.:12.5KG G.W:14KG
20 feet container can hold 6840pcs
40 feet container can hold 14400pcs


MF113a


MF113b



MF113c


MF113d


MF113e

MF113
Capacity:130kg/300lb
Graduation:1000g/2lb
Dimensions of the scale:
24.3x26.8x4.2cm
Packing volume:58x27.3x24.2cm
10pcs/ctn
N.W.:12.5KG G.W:14KG
20 feet container can hold 6840pcs
40 feet container can hold 14400pcs


MF114a


MF114b


MF114c


MF114d


MF114e

MF114
Capacity:130kg/300lb
Graduation:1000g/2lb
Dimensions of the scale:
24.3x26.8x4.2cm
Packing volume:58x27.3x24.2cm
10pcs/ctn
N.W.:12.5KG G.W:14KG
20 feet container can hold 6840pcs
40 feet container can hold 14400pcs


MF115a


MF115b


MF115c


MF115d


MF115e

MF115
Capacity:130kg/300lb
Graduation:1000g/2lb
Dimensions of the scale:
24.3x26.8x4.2cm
Packing volume:58x27.3x24.2cm
10pcs/ctn
N.W.:12.5KG G.W:14KG
20 feet container can hold 6840pcs
40 feet container can hold 14400pcs


MF116a


MF116b


MF116c


MF116d



MF116e


MF116
Capacity:130kg/300lb
Graduation:1000g/2lb
Dimensions of the scale:
20x28x4.7cm
Packing volume:49.2x30.7x26.2cm
10pcs/ctn
N.W.:12.2KG G.W:13.8KG
20 feet container can hold 6400pcs
40 feet container can hold 13400pcs


MF117a



MF117b



MF117c



MF117d



MF117e

MF117
Capacity:130kg/300lb
Graduation:1000g/2lb
Dimensions of the scale:20x28x4.7cm
Packing volume:49.2x30.7x26.2cm
10pcs/ctn
N.W.:12.2KG G.W:13.8KG
20 feet container can hold 6400pcs
40 feet container can hold 13440pcs


MF118a


MF118b


MF118c


MF118d



MF118e


MF118f

MF118
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale:26.2x27x5.3cm
Packing volume: 57x28.3x28.7cm 10pcs/ctn
N.W.:14.8KG G.W:16.5KG
20 feet container can hold 6400pcs
40 feet container can hold 13120pcs


MF119a


MF119b


MF119c


MF119d


MF119e


MF119f


MF119g


MF119h


MF119i


MF119j


MF119k


MF119l


MF119m


MF119n


MF119O


MF119P



MF119q


MF119r


MF119s


MF119t


MF119u


MF119v


MF119w


MF119x


MF119y


MF119z


MF119zz

MF119
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale: 25.7x26.3x5cm
Packing volume:54.7x28x28.2cm 10pcs/ctn
N.W.:14.3KG G.W:16.3KG
20 feet container can hold 6720pcs
40 feet container can hold 13440pcs


MF120a


MF120b



MF120c


MF120
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale: 25.7x26.3x5cm
Packing volume:54.7x28x28.2cm 10pcs/ctn
N.W.:14.3KG G.W:16.3KG
20 feet container can hold 6720pcs
40 feet container can hold 13440pcs


MF121a


MF121b


MF121c


MF121d


MF121e


MF122a


MF122b


MF122c


MF122d


MF121
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale: 25.7x26.3x5cm
Packing volume:54.7x28x28.2cm 10pcs/ctn
N.W.:14.3KG G.W:16.3KG
20 feet container can hold 6720pcs
40 feet container can hold 13440pcs

MF122
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale: 25.7x26.3x5cm
Packing volume:54.7x28x28.2cm 10pcs/ctn
N.W.:14.3KG G.W:16.3KG
20 feet container can hold 6720pcs
40 feet container can hold 13440pcs


MF123a


MF123b


MF123c


MF123d


MF124a


MF124b



MF124c


MF124d


MF125a


MF125b


MF126a


MF126b


MF126c


MF126d


MF127a


MF127b


MF127c


MF127d


MF128a



MF128b


MF128c


MF128d


MF129a



MF129b


MF130a


MF130b


MF130c


MF130d


MF131a


MF131b


MF131c


MF131d


MF131e


MF132a



MF132b


MF132c



MF132d


MF132e


MF133a



MF133b



MF133c


MF133d


MF134a


MF134b


MF134c


MF134d


MF123-MF132
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale:
25.7x26.3x5cm(MF123-MF131),
26.2x27x5.3cm(MF132)
Packing volume:
54.7x28x28.2cm(MF123-MF131),
57x28.3x28.7cm(MF132)10pcs/ctn
N.W.:14.2KG G.W:16 KG(MF123-MF131)
N.W.:15.5KG G.W:17 KG(MF132)

MF133/MF134
Capacity:130kg/280lb
Graduation:1000g/2lb
Dimensions of the scale:
26.7x26.8x5.85cm(MF133),
26.7x26.8x5.0cm(MF134)
Packing volume:
57.8x30x33.5cm(MF133)
56.5x29.5x30cm (MF134)10pcs/ctn
N.W.:14.2KG G.W:16.4. KG



MF135a


MF135b


MF136a


MF136b

MF135/MF136
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale:
25.7x26.3x5.3cm
Packing volume:57.4x28x28.2cm
10pcs/ctn
N.W.:14.2KG G.W:16.. KG
20 feet container can hold 6400pcs
40 feet container can hold 12800pcs



MF137a


MF137b

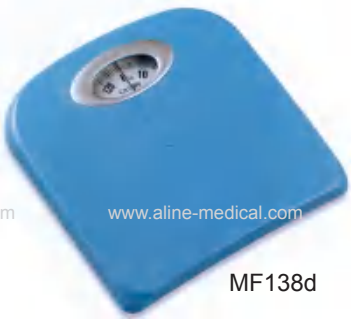

MF137c

MF137
Capacity:150kg/330lb
Graduation:1000g/2lb
Dimensions of the scale:
28.3x29.2x5.1m
Packing volume:64.6x31.8x32.2cm
10pcs/ctn
N.W.:19.6KG G.W:22.4. KG
20 feet container can hold 4410pcs
40 feet container can hold 8820pcs


MF138a



MF138b


MF138c


MF138d


MF139a


MF139b


MF139c


MF139d


MF140a


MF140b


MF140c


MF140d


MF138
Capacity:130kg/300lb
Graduation:1000g/2lb
Dimensions of the scale: 28x28.8x4.5cm
Packing volume:61.9x30.7x28.5cm 10pcs/ctn
N.W.:14.4. KG G.W:16.3 KG
20 feet container can hold 5040pcs
40 feet container can hold 10320pcs

MF139
Capacity:130kg/300lb
Graduation:1000g/2lb
Dimensions of the scale: 26.5x27.5x5.5cm
Packing volume:58.7x29.5x31.5cm 10pcs/ctn
N.W.:13.5 KG G.W:15.2. KG
20 feet container can hold 5320pcs
40 feet container can hold 10920pcs


MF140
Capacity:130kg/300lb
Graduation:1000g/2lb
Dimensions of the scale: 30x31.5x4.7cm
Packing volume:34.4x31.7x32.4cm 6pcs/
ctn
N.W.:8.3KG G.W:9.8KG
20 feet container can hold 4740pcs
40 feet container can hold 9496pcs



MF141a



MF141b


MF141c


MF141
Capacity:130kg/300lb
Graduation:1000g/2lb
Dimensions of the scale:
26.9x29x4.9cm
Packing volume:62.5x30.5x28cm
10pcs/ctn
N.W.:14. KG G.W:16..5. KG
20 feet container can hold 5040pcs
40 feet container can hold 10320pcs


MF142a

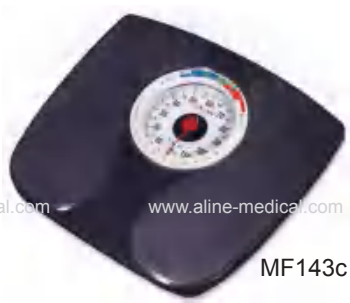

MF142b


MF142c

MF142
Capacity:130kg/300lb
Graduation:1000g/2lb
Dimensions of the scale:
23.5x28.6x5.5cm
Packing volume:50.2x30.5x29.3cm
10pcs/ctn
N.W.:13.7 KG G.W:15.4 KG
20 feet container can hold 6160pcs
40 feet container can hold 12880pcs


MF143a


MF143b

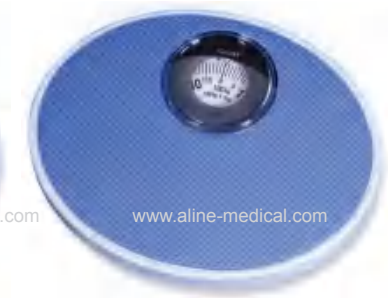

MF143c


MF143
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale:
28.5x32x5.5cm
Packing volume:35.5x30.7x36.5cm
6pcs/ctn
N.W.:9.5. KG G.W:11.4. KG
20 feet container can hold 4032pcs
40 feet container can hold 8316pcs


MF144a


MF144b


MF145a


MF145b


MF146a


MF146b



MF146c


MF146d

MF144
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale: 31.5x28.3x6cm
Packing volume:33.7x31.9x38.7cm 6pcs/ctn
N.W.:9.6 KG G.W:11.4 KG
20 feet container can hold 4368pcs
40 feet container can hold 8736pcs


MF145
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale: 35.7x29.5x6cm
Packing volume:40x38.7x33cm 6pcs/ctn
N.W.:11.6KG G.W:13.5.. KG
20 feet container can hold 3528pcs
40 feet container can hold 7308pcs

MF146
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale: 29x28.7x6.1cm
Packing volume:63.5x31.5x32.3cm 10pcs/ctn
N.W.:16KG G.W:18.4 KG
20 feet container can hold 4410pcs
40 feet container can hold 8820pcs


MF147a


MF147b


MF147c


MF147d


MF148a


MF148b

MF147
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale: 28.55x29x6cm
Packing volume:61x32x34.6cm 10pcs/ctn
N.W.:19KG G.W:16.6 KG
20 feet container can hold 3780pcs
40 feet container can hold 7980pcs

MF148
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale: 31.5x28.8x6.3cm
Packing volume:65.7x34.9x32.5cm 10pcs/ctn
N.W.:16.8 KG G.W:19.7 KG
20 feet container can hold 3920pcs
40 feet container can hold 8120pcs


MF149a



MF149b


MF149c

MF149
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale:
31.5x26.8x5.4cm
Packing volume:46.7x28.5x33.3cm
8pcs/ctn
N.W.:13.1 KG G.W:14.4 KG
20 feet container can hold 5248pcs
40 feet container can hold 10752pcs


MF150a


MF150b


MF150c

MF150
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale:
29.1x29x5.7cm
Packing volume:49x31.7x32.8cm
8pcs/ctn
N.W.:13.4 KG G.W:15.3 KG
20 feet container can hold 4368pcs
40 feet container can hold 9184pcs



MF151a



MF151b


MF151c

MF151
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale:
28.8x27.7x6cm
Packing volume:64x30.2x32.3cm
10pcs/ctn
N.W.:16.7 KG G.W:20 KG
20 feet container can hold 4410pcs
40 feet container can hold 9240pcs


MF152a



MF152b


MF152c

MF152
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale:
28.7x27.6x6.6cm
Packing volume:65x31.4x35cm
10pcs/ctn
N.W.:16.6 KG G.W:19.2. KG
20 feet container can hold 3720pcs
40 feet container can hold 7740pcs


MF153a



MF153b


MF153c


MF153
Capacity:120kg/260lb
Graduation:1000g/2lb
Dimensions of the scale:
28x29x5.5cm
Packing volume:32.5x31.2x47.5cm
8pcs/ctn
N.W.:13.1. KG G.W:14.8 KG
20 feet container can hold 5040pcs
40 feet container can hold 10360pcs



MF154a



MF154b


MF154c

MF154
Capacity:150kg/330lb
Graduation:1000g/2lb
Dimensions of the scale:
31.8x33x6.6.5cm
Packing volume:35.5x34.4x44.8cm
6pcs/ctn
N.W.:14.1. KG G.W:16.1. KG
20 feet container can hold 2880pcs
40 feet container can hold 6120pcs


MF155a


MF155b


MF155c

MF155
Capacity:150kg/330lb
Graduation:1000g/2ib
Dimensions of the scale:
32x33.5x6.3cm
Packing volume:37.5x34.9x42.3cm
6pcs/ctn
N.W.:13.5. KG G.W:15.4. KG
20 feet container can hold 2880pcs
40 feet container can hold 5940pcs



MF156a



MF156b


MF156c

MF156
Mechanical health scale
Max:120kg
Division:1kg
Option:plastic frame.colourful
mat or customer's design


MF157a


MF157b


MF157c


MF157 Capacity:130kg/300lb
Graduation:1000g/2ib
Dimensions of the scale:
29.6x28.2x5.7cm
Dimensions of colour
box:31.0x29.0x6.0cm
Packing volume:63.5x31.0x33.0cm
10pcs/ctn
N.W.:14.0 KG G.W:16.1 KG
20 feet container can hold 4410pcs
40 feet container can hold 8820pcs

ELECTRONIC KITCHEN SCALE



MF158

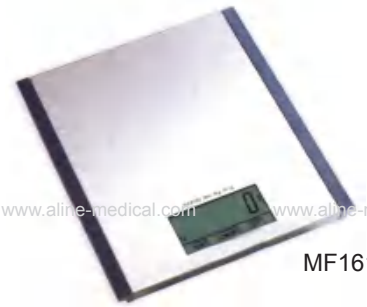

MF159

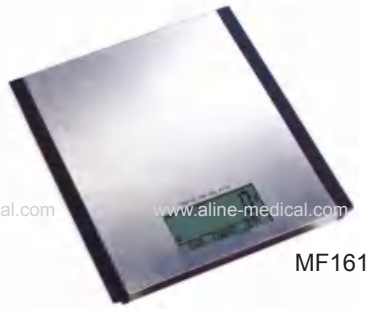

MF160

MF158
Stainless steel platform,Real time clock
Room thermometer and alarm timer,Touch screen
Measure volume of water and milk,Hang to stow
Capacity :5kg/11lb,Graduation:1g/0.1oz
Power:2x3V lithium cells(CR2032)
Dimensions of the scale: 23.3x17.2x3cm
Dimensions of colour box:25.5x19.8x5.1cm
Packing volume:41.5x26.5x32.5cm 12pcs/ctn
N.W.:9.2KG G.W:11.2KG
20 feet container can hold 9408pcs
40 feet container can hold 19488pcs

MF159
Stainless steel platform
Touch screen,Hang to stow
Capacity :5kg/11lb
Graduation:1g/0.05oz
Power:1x3V lithium cells(CR2032)
Dimensions of the scale: 19.2x18.4x3.4cm
Dimensions of colour box:21.5x20.3x5.1cm
Packing volume:42x23x32.5cm 12pcs/ctn
N.W.:7.7KG G.W:9.4KG
20 feet container can hold 10668pcs
40 feet container can hold 22176pcs

MF160
Stainless steel housing
Blue LCD backlight
Room thermometer and alarm timer
Capacity :5kg/11lb
Graduation:1g/0.1oz
Power:1x9V(not included)
Dimensions of the scale: 20x19x2.8cm
Packing volume:44.8x23.9x31.8cm 12pcs/ctn
N.W.:9KG G.W:11KG
20 feet container can hold 9660pcs
40 feet container can hold 20160pcs

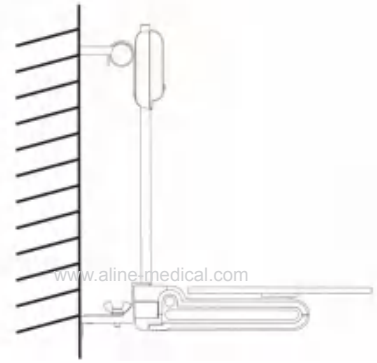

MF161a


MF161b

MF161a/M161b
Stainless steel housing
Touch screen
Capacity :5kg/11lb
Graduation:1g/0.05oz
Power:1x3V lithium cells(CR2032)
Dimensions of the scale: 19.2x17.2x2.8cm
Packing volume:41.5x23x32cm 12pcs/ctn
N.W.:7.4KG G.W:9KG
20 feet container can hold 10668pcs
40 feet container can hold 22176pcs


MF162a


MF162b



MF162a/MF162b
Room thermometer and alarm timer
Blue LCD backlight
0.5”(13mm)LCD digits
Capacity :5kg/11lb
Graduation:1g/0.1oz
Power:4x1.5V AAA(not included)
Dimensions of the scale: 25.9x15x5.3cm
Dimensions of colour box:29.4x18.8x8.4cm
Packing volume:58x31x36cm 12pcs/ctn
N.W.:10.5KG G.W:15.5KG
20 feet container can hold 4824pcs
40 feet container can hold 10080pcs



MF163a


MF163b


MF163c

MF163a/MF163b/MF163c
White LCD backlight,Real time clock
Room thermometer and alarm timer
Tempered glass weighing platform
Anodized aluminium alloy body
Measure volume of water and milk
Capacity :5kg/11lb,Graduation:1g/0.1oz
Power:1x9V(not included)
Dimensions of the scale: 19.5x15x4.4cm
Dimensions of colour box:22.2x17.5x7.35cm
Packing volume:54.5x24x31.5cm 12pcs/ctn
N.W.:8.9KG G.W:11.8KG
20 feet container can hold 7560pcs
40 feet container can hold 15876pcs


MF164a

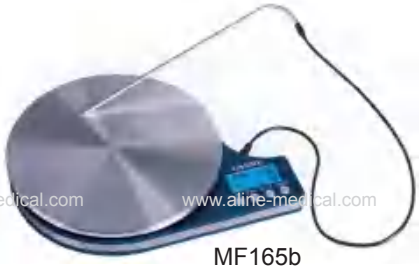

MF164b


MF164c


MF164d

MF164
0.55”(14mm)LCD digits
Capacity :5kg/11lb,Graduation:1g/0.1oz
Power:1x3V lithium cells(CR2032)
Dimensions of the scale: 22.2x17.5x5.6cm
Dimensions of colour box:22.5x18x6.4cm
Packing volume:56x24.5x28cm 12pcs/ctn
N.W.:4.4KG G.W:6.2KG
20 feet container can hold 8640pcs
40 feet container can hold 17664pcs


MF165a


MF165b


MF165c

MF165
With food thermoscope
With temperature alarm
Room thermometer and alarm timer
Blue backlight
Temperature detecting scope:0-150℃(32-302°F)
Round edge stainless steel platform
High precision strain gauge sensor
0.5"(13mm)LCD digits
Power:1x9v battery (not included)
Dimensions of the scale: 24x19x3cm
Packing volume:49.3x30.2x36.4cm 12pcs/ctn
N.W.:9.9KG G.W:12.8KG
Capacity :5kg/11lb
Graduation:2g/0.1oz
20 feet container can hold 5976pcs
40 feet container can hold 12600pcs


MF166a


MF166b


MF167a


MF167b

MF166/MF167 To save and recall up to 99 records of nutritional values with high precision strain gauge sensor
Temperature sensor and alarm timer inside 64x32mm extra big LCD
Low power and overload indication
Manual off or auto off
Capacity:5kg/11lb
Graduation:1g/0.05oz
Power:1x9v battery (not included)

MF166
Dimensions of the scale: 24.1x19.7x4.8cm
Packing volume:45.5x29x43cm 12pcs/ctn
N.W.:7.7KG G.W:10.6KG
20 feet container can hold 5760pcs
40 feet container can hold 12000pcs

MF167
Dimensions of the scale: 24.1x19.7x3.7cm
Packing volume:47.5x30x37.2cm 12pcs/ctn
N.W.:6.6KG G.W:10.2KG
20 feet container can hold 6480pcs
40 feet container can hold 13176pcs



MF168a


MF168b


MF169a


MF169b




MF170

MF168
High precision strain gauge sensor
Stainless steel bowl and housing
White LCD backlight
Alarm timer and thermometer
Auto zero:auto –off or manual-off
Low battery/over load indication
Capacity:5kg/11lb
Graduation:1g/0.1oz
Power:1x9v battery (not included)
Dimensions of the scale: Φ21.5x14.5cm
Packing volume:46x46x35cm 12pcs/ctn
N.W.:6.5KG G.W:10.3KG
20 feet container can hold 4320pcs
40 feet container can hold 9000pcs

MF169
High precision strain gauge sensor
With removeable stainless steel plate
Alarm timer and thermometer
Auto zero:auto –off or manual-off
Low battery/over load indication
Capacity:5kg/11lb
Graduation:1g/0.1oz
Power:1x9v battery (not included)
Dimensions of the scale:
22x17.4x3.6cm
Packing volume:36.7x28x48.8cm
12pcs/ctn
N.W.:6.3KG G.W:9.8KG
20 feet container can hold 6552pcs
40 feet container can hold 13632pcs

MF170
To save and recall up to 99 records of nufritional values
Room thermometer and alarm timer
Stainless steel weighing platform
40.5x37mm extra big LCD,blue LCD backlight
Capacity :5kg/11lb
Graduation:1g/0.05oz
Power:1x9V(not included)
Dimensions of the scale:
19.8x19.4x3.6cm
Dimensions of colour box:23x22.5x6cm
Packing volume:47.3x24x38.5cm
12pcs/ctn
N.W.:10.1KG G.W:13.1KG
20 feet container can hold 7776pcs
40 feet container can hold 15552pcs



MF171a



MF171b



MF171c

MF171
High precision strain gauge sensor
0.5”(13mm)LCD digits
Auto zero:auto –off
Low battery/over load indication
Capacity:2kg/4lb 6oz;5kg/11lb
Graduation:1g/0.05oz;2g/0.1oz
Power:1x9v battery (not included)
Dimensions of the scale: Φ21.5x14.5cm
Packing volume:51.5x45x28cm 8pcs/ctn
N.W.:6.3KG G.W:9.3KG
20 feet container can hold 3520pcs
40 feet container can hold 7040pcs



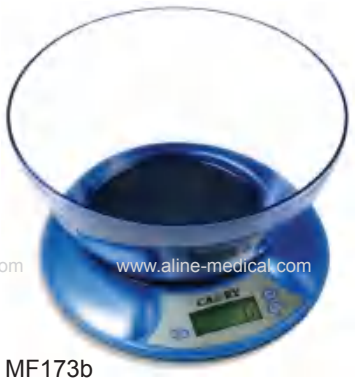
MF172a



MF172b



MF173a



MF173b

MF172
High precision strain gauge sensor
Display screen:46x21mm
Alarm timer and thermometer
Auto zero:auto –off
Low battery/over load indication
Capacity:2kg/4lb 6oz;5kg/11lb
Graduation:1g/0.1oz;2g/0.1oz
Power:1x9v volts battery (not included)
Packing volume:53.5x44.5x34cm 12pcs/ctn
N.W.:10KG G.W:12.1KG
20 feet container can hold 4536pcs
40 feet container can hold 9156pcs

MF173
High precision strain gauge sensor
0.5”(13mm)LCD digits
Auto zero:auto –off
Low battery/over load indication
Capacity:2kg/4lb 6oz;5kg/11lb
Graduation:1g/0.05oz;2g/0.1oz
Power:1x9v volts battery (not included)
Packing volume:70.5x46.4x25cm 12pcs/ctn
N.W.:7.2KG G.W:10.3KG
20 feet container can hold 4320pcs
40 feet container can hold 8640pcs



MF174a



MF174b



MF175a



MF175b

MF174
High precision strain gauge sensor
0.5”(13mm)LCD digits
Auto zero:auto –off
Low battery/over load indication
Capacity:2kg/4lb 6oz;5kg/11lb
Graduation:1g/0.05oz;2g/0.1oz
Power:1x9v volts battery (not included)
Packing volume: 70.5x46.4x25cm 12pcs/ctn
N.W.:7.2KG G.W:10.3KG
20 feet container can hold 4320pcs
40 feet container can hold 8640pcs

MF175
High precision strain gauge sensor
0.5”(13mm)LCD digits
Auto zero:auto –off
Low battery/over load indication
Capacity:5kg/11lb
Graduation:1g/0.05oz;
Power:1x9v volts battery (not included)
Packing volume: 56x45.2x35.2cm 12pcs/ctn
N.W.:7.1KG G.W:10.4KG
20 feet container can hold 3600pcs
40 feet container can hold 7560pcs



MF176a



MF176b

MF176
High precision strain gauge sensor
Display screen:46x21.5mm
Alarm timer and thermometer
Auto zero:auto –off
Low battery/over load indication
Capacity:5kg/11lb
Graduation:1g/0.1oz
Power:1x9volts battery (not included)
Packing volume: 55x54.5x34.1cm 12pcs/ctn
N.W.:7.5KG G.W:11.4KG
20 feet container can hold 3360pcs
40 feet container can hold 7056pcs


MF177a


MF177b


MF177c

MF177
High precision strain gauge sensor
0.5”(13mm)LCD digits
Auto zero:auto –off
Low battery/over load indication
Capacity:2kg/4lb 6oz;5kg/11lb
Graduation:1g/0.05oz;2g/0.1oz
Power:1x9v battery (not included)
Packing volume: 77x51.5x38.3cm
12pcs/ctn
N.W.:8.2KG G.W:13.6KG
20 feet container can hold 2376pcs
40 feet container can hold 4752pcs

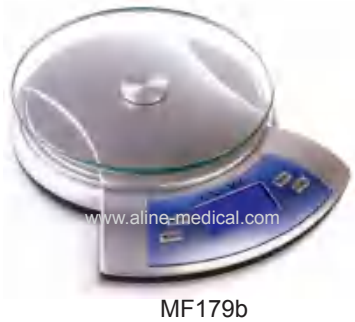

MF178a


MF178b


MF178c

MF178
High precision strain gauge sensor
0.5”(13mm)LCD digits
Auto zero:auto –off
Low battery/over load indication
Capacity:5kg/11lb
Graduation:1g/0.05oz;
Power:1x9v battery (not included)
Packing volume: 48x36x26.5cm 12pcs/ctn
N.W.:7.3KG G.W:9.9KG
20 feet container can hold7296pcs
40 feet container can hold14592pcs


MF179a


MF179b

MF179
High precision strain gauge sensor
Display screen:46x21.5cm
Alarm timer and thermometer blue backlight
Auto zero-auto off
Low battery/over load indication
Power:1x9volts battery (not included)
Packing volume: 44x26.4x42.6cm 12pcs/ctn
N.W.:7.3KG G.W:9.7KG
Capacity:5kg/11lb
Graduation:1g/0.1oz
20 feet container can hold 6300pcs
40 feet container can hold13200pcs

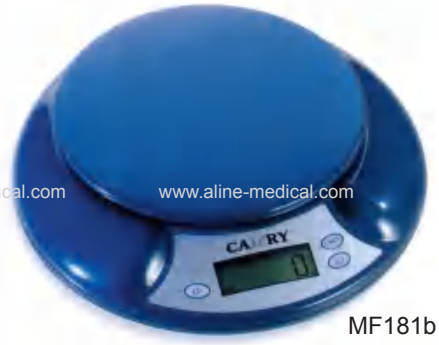

MF180a


MF180b


MF180c

MF180
High precision strain gauge sensor
0.5”(13mm)LCD digits
Auto zero:auto –off
Low battery/over load indication
Capacity:2kg/4lb 6oz;5kg/11lb
Graduation:1g/0.05oz;2g/0.1oz
Packing volume: 63x53.5x35cm
12pcs/ctn
N.W.:8.3KG G.W:13.8KG
20 feet container can hold 2736pcs
40 feet container can hold 5616pcs


MF181a


MF181b

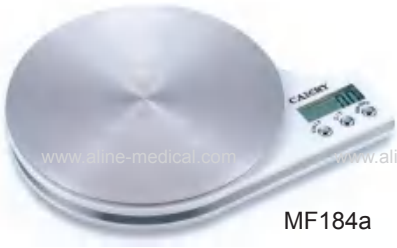
MF181
High precision strain gauge sensor
0.5”(13mm)LCD digits
Auto zero:auto –off
Low battery/over load indication
Capacity:2kg/4lb 6oz;5kg/11lb
Graduation:1g/0.05oz;2g/0.1oz
Power:1x9volts battery (not included)
Packing volume: 46.5x46.5x23cm 12pcs/ctn
N.W.:5.2KG G.W:8.2KG
20 feet container can hold 7200pcs
40 feet container can hold15000pcs

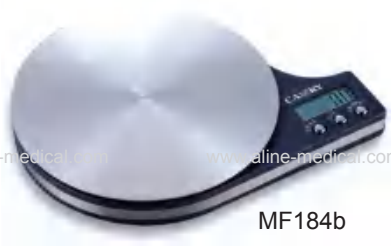

MF182a

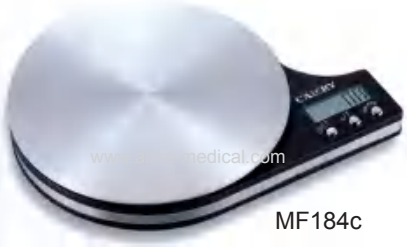

MF182b


MF183a


MF183b


MF184a


MF184b


MF184c

MF182
High precision strain gauge sensor
0.5"(13mm)LCD digits
Auto zero:auto –off
Low battery/over load indication
Capacity:5kg/11lb
Graduation:1g/0.05oz;
Power:1x9volts battery (not included)
Packing volume: 39.6x27x40.3cm 12pcs/ctn
N.W.:5.2KG G.W:8.4KG
20 feet container can hold 7140pcs
40 feet container can hold 14760pcs

MF183
High precision strain gauge sensor
Display screen:46x21.5mm
Alarm timer and thermometer
Auto zero:auto –off
Low battery/over load indication
Capacity:5kg/11lb
Graduation:1g/0.1oz
Power:1x9volt battery (not included)
Packing volume: 36.7x28x48.8cm 12pcs/ctn
N.W.:4.3KG G.W:8.7KG
Capacity :5kg/11ib Graduation :1g/0.1oz
20 feet container can hold 6552pcs
40 feet container can hold 13560pcs

MF184
High precision strain gauge sensor
0.5"(13mm)LCD digits
Auto zero:auto –off
Low battery/over load indication
Capacity:2kg/4lb 6oz;5kg/11lb
Graduation:1g/0.05oz;2g/0.1oz
Power:1x9volts battery (not included)
Packing volume: 49.3x30.2x36.4cm 12pcs/ctn
N.W.:7.6KG G.W:12.1KG
20 feet container can hold 5976pcs
40 feet container can hold 12600pcs


MF185


MF186


MF187

Auto zero trace
Auto off
Overload indication
Negative indication
High precision sensor
Stainless steel

MF185/MF186/MF187
Electronic kitchen scale
Max:5000kg
Division:2g
Option:g/oz switchable


MF188


MF189


MF190


MF191

Auto zero trace
Auto off
Overload indicaton
Negative indication
High precision sensor

MF188-MF196
Electronic kitchen scale
Max:5000kg,Division:2g
(MF195/MF196)
MAX:2000kg,Division:1g
(MF188-MF194)
Option:g/oz switchable


MF192


MF193


MF194


MF195


MF196

MECHANICAL KITCHEN SCALE


MF197a


MF197b


MF198a


MF198b


MF199a


MF199b


MF200a


MF200b

MF197/MF198
CAPACITY:1KG/2.2LB,2kg/4.4LB,
3kg/6.6IB,4kg/8.8lb,
Gradution:5g/1/4oz, 10g/1/2oz, 20g/1/2oz,
20g/1oz,
Packing volume:49.3x34x39.8cm 8pcs/ctn
N.W:8.8kg G.W:11kg
20 feet container can hold 3160 pcs
40 feet container can hold 6360 pcs

MF199
CAPACITY:1KG/2.2LB,2kg/4.4LB,
3kg/6.6IB,4kg/8.8lb,5kg/11lb
Gradution:5g/1/4oz, 10g/1/2oz, 20g/1/2oz,
20g/1oz,20g/1oz
Packing volume:69.5x50x25.5cm 6pcs/ctn
N.W:10.8kg G.W:12.6kg
20 feet container can hold 1890 pcs
40 feet container can hold 3834 pcs

MF200
CAPACITY:1KG/2.2LB,2kg/4.4LB,
3kg/6.6IB,4kg/8.8lb,5kg/11lb
Gradution:5g/1/4oz, 10g/1/2oz, 20g/1/2oz,
20g/1oz,20g/1oz
Packing volume:47.5x41.5x47.5cm 8pcs/ctn
N.W:14kg G.W:16kg
20 feet container can hold 2520 pcs
40 feet container can hold 5280 pcs


MF201


MF202


MF203

MF201
CAPACITY:2kg/4.4ib, 3kg/6.6IB,4kg/8.8lb,5kg/11lb
Gradution: 10g/1/2oz, 20g/1/2oz, 20g/1oz,25g/1oz
Packing volume:57.3x56x44cm 8pcs/ctn
N.W:7.8kg G.W:12.5kg
20 feet container can hold 1600 pcs
40 feet container can hold 3200 pcs

MF202
CAPACITY:2kg/4.4lb, 3kg/6.6lb,4kg/8.8lb,5kg/11lb
Gradution: 10g/1/2oz, 20g/1/2oz, 20g/1oz,25g/1oz
Packing volume:57.5x56x36cm 8pcs/ctn
N.W:9kg G.W:13kg
20 feet container can hold 1920 pcs
40 feet container can hold3840 pcs

MF203
CAPACITY:2kg/4.4lb,
3kg/6.6lb,4kg/8.8lb,5kg/11lb
Gradution: 10g/1/2oz, 20g/1/2oz,
20g/1oz,25g/1oz
Packing volume:55.6x40.5x35.5cm 8pcs/ctn
N.W:8kg G.W:11.2kg
20 feet container can hold 2688 pcs
40 feet container can hold 5376 pcs


MF204a


MF204b


MF205a


MF205b

MF204
CAPACITY:1KG/2.2LB,2kg/4.4lb, 3kg/6.6lb,4kg/8.8lb,5kg/11lb
Gradution:5g/1/4oz, 10g/1/2oz, 20g/1/2oz, 20g/1oz,25g/1oz
Packing volume:63.3x43.5x38cm 24pcs/ctn
N.W:11.8kg G.W:15.5kg
20 feet container can hold 6912 pcs
40 feet container can hold 13824 pcs

MF205
CAPACITY:500g/1.1lb, 1kg/2.2lb,2kg/4.4lb
Gradution:2g/1/8oz, 5g/1/8oz, 10g/1/4oz,
Packing volume:40.9x38.2x45.5cm 12pcs/ctn
N.W:7.8kg G.W:10.2kg
20 feet container can hold 5040 pcs
40 feet container can hold 10080 pcs


MF206a


MF206b


MF207a


MF207b


MF207c


MF207d


MF207e


MF207f


MF207g

MF206
CAPACITY:2.2KG/5LB,3kg/6.5lb,
Gradution:25g/1oz, 25g/1oz
Packing volume:47.2x46x33.5cm 12pcs/ctn
N.W:8.7kg G.W:11.1kg
20feet container can hold 5040 pcs
40 feet container can hold 10500 pcs

MF207
CAPACITY:1KG/2.2LB,2kg/4.4lb, 3kg/6.6lb,4kg/8.8lb,5kg/11lb
Gradution:5g/1/4oz, 10g/1/2oz, 20g/1/2oz, 20g/1oz,25g/1oz
Packing volume:65.5x48.4x38.5cm 24pcs/ctn
N.W:14kg G.W:18.4kg
20 feet container can hold 5904 pcs
40 feet container can hold 11952 pcs


MF208a


MF208b


MF208c


MF208d


MF208e


MF209a


MF209b


MF209c


MF209d

MF208

CAPACITY:1KG/2.2LB,2kg/4.4lb, 3kg/6.6lb,4kg/8.8lb,5kg/11lb
Gradution:5g/1/4oz, 10g/1/2oz, 20g/1/2oz, 20g/1oz,25g/1oz
Packing volume:63.3x43.5x38cm 24pcs/ctn
N.W:11.8kg G.W:15.5kg
20 feet container can hold 6912 pcs
40 feet container can hold 13824 pcs

MF209

CAPACITY: 2.2kg/5lb, 3kg/6.5lb
Gradution:25g/1oz, 25g/1oz
Packing volume:59.8x40.5x40.8cm 24pcs/ctn
N.W:13.6kg G.W:17.4kg
20 feet container can hold 6000 pcs
40 feet container can hold 12600 pcs


MF210a


MF210b


MF210c

MF210

CAPACITY:100g,200g,250g,500g
Gradution:1g/2g,2g/5g,2g/5g,5g/10g
Packing volume:38.4x29.2x22.5cm
24pcs/ctn
N.W:3.7kg G.W:4.7kg
20 feet container can hold 27120 pcs
40 feet container can hold 54720 pcs


MF211a


MF211b


MF211c

MF211

CAPACITY: 2kg/4.4lb, 3kg/6.6lb,4kg/8.8lb
Gradution: 10g/1/2oz, 20g/1/2oz, 20g/1oz
Packing volume:45.8x32.2x42.2cm
12pcs/ctn
N.W:6.9kg G.W:9kg
20 feet container can hold 5040 pcs
40 feet container can hold 10500 pcs


MF212a


MF212b


MF212c

MF212
CAPACITY:2kg/4.4lb,
3kg/6.6lb,4kg/8.8lb,5kg/11lb
Gradution: 10g/1/2oz,
20g/1oz,25g/1oz
Packing volume:57.5x56x36cm
8pcs/ctn
N.W:9kg G.W:13kg
20 feet container can hold
1920 pcs
40 feet container can hold
3840 pcs


MF213a


MF213b


MF213c

MF213
CAPACITY:1kg/2.2lb, 2kg/4.4lb,3kg/6.6lb,4kg
/8.8lb,5kg/11lb
Gradution: 5g/1/4oz,10g/1/2oz,
10g/1/2oz,20g/1oz,20g/1oz
Packing volume:47.5x41.5x47.5cm 8pcs/ctn
N.W:14kg G.W:16kg
20 feet container can hold 2520 pcs
40 feet container can hold 5280 pcs


MF214a


MF214b

MF214
CAPACITY:1kg/2.2lb, 2kg/4.4lb,3kg/6.6lb,
4kg/8.8lb,5kg/11lb
Gradution: 5g/1/4oz,10g/1/2oz,
10g/1/2oz,20g/1oz,20g/1oz
Packing volume:69.5x50x25.5cm 6pcs/ctn
N.W:10.8kg G.W:12.6kg
20 feet container can hold 1890 pcs
40 feet container can hold 3834 pcs


MF215

MF215
CAPACITY:1kg,2kg,3kg,4kg,5kg
Gradution: 5g,10g,10g,20g,20g
Packing volume:47.5x41.5x47.5cm 8pcs/ctn
N.W:12.5kg G.W:15kg
20 feet container can hold 2520 pcs
40 feet container can hold 5280 pcs


MF216

model	MF216a	MF216b	MF216c	MF216d
max capacity	900g/2lb	2000g/5lb	5000g/12.5lb	1000g
graduation	5g	10g	25g	5g
dimension	148x140mm		Φ170mm	


MF217a


MF217b


MF217c


MF217d


MF218a


MF218b


MF218c


MF218d


MF218e

MF217
CAPACITY:1KG/2.2LB,2kg/4.4lb, 3kg/6.6lb,4kg/8.8lb,5kg/11lb
Gradution:5g/1/4oz, 10g/1/2oz, 20g/1/2oz,20g/1oz,25g/1oz
Packing volume:51.9x35x35cm 12pcs/ctn
N.W:5.3kg G.W:7.8kg
20 feet container can hold 5112 pcs
40 feet container can hold 10296 pcs

MF218
CAPACITY:0.5KG/1.1LB,1kg/2.2lb, 2kg/4.4lb,
Gradution:2g/1/8oz, 5g/1/8oz, 10g/1/4oz,
Packing volume:40.9x38.2x45.5cm 12pcs/ctn
N.W:7.8kg G.W:10.2kg
20 feet container can hold 5040 pcs
40 feet container can hold 10080 pcs

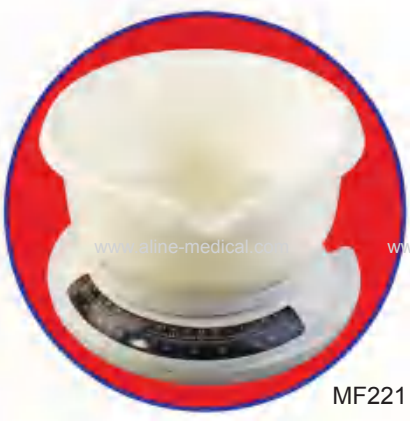

MF219a


MF219b


MF219c

MF219
Kitchen Scale
Precision:
1kgx5g
2kgx10g
3kgx20g
4kgx20g
5kgx25g


MF220


MF221


MF222

MF220
Max:5000g
Division:50g

MF221
Max:2000g
Division:20g

MF222
Max:3000g
Division:20g



MF223
CAPACITY:2KG,.3kg, 4kg,5kg
Gradution:25g,50g,50g,50g
Packing volume:44.5x31x28cm 100pcs/ctn
N.W:6.5kg G.W:8.3kg
20 feet container can hold 72800 pcs

MF224
CAPACITY:2KG,.3kg, 4kg,5kg
Gradution:25g,50g,50g,50g
Packing volume:47x29.8x26cm 100pcs/ctn
N.W:7.3kg G.W:8kg
20 feet container can hold 83700 pcs



MF225
CAPACITY:2.5KG,.5kg, 8kg,10kg
Gradution:25g,50g,100g,100g
Packing volume:48.5x31.5x26.5cm 100pcs/ctn
N.W:7.9kg G.W:8.8kg
20 feet container can hold 72900 pcs



MF226 Tare and zero functions
Auto off feature
Easy to read 4.5 digital lcd display
Measure:kg/lb(option)
Power sources:2xAAA batteries

Model	Capacity KG	Resolution G
DGC-10	10	5
DGC-20	20	10
DGC-40	40	20
DGC-50	50	50

MF227 Type Measure Scale(22kg/5016)

MF228 Hook scale(22kg/5016)
Capacity:25kg/55lb,50kg/110lb,
100kg/220lb,150kg/330lb
Graduation:120g/40z,200g/80z,
500g/1lb,500g/1lb

MF229 Hook scale(25kg)



MF230 LTZ pull scale

model	inner	dia.(mm)	length(mm)	max capacity	graduation
LTZ-50	50	455	500	10	2.4
LTZ-30	38	340	300	10	0.92
LTZ-20	32	340	200	5	0.7
LTZ-10	25	340	100	2	0.48
LTZ-5	22	280	50	1	0.28
LTZ-3	22	280	30	0.5	0.28
LTZ-2	22	280	20	0.5	0.28
LTZ-1	22	280	10	0.2	0.28
LTZ-0.5	22	280	5	0.1	0.28
LTZ-0.25	22	280	2.5	0.05	0.28
LTZ-0.2	22	280	2	0.05	0.28
LAB	12	225	10-100g	0.2-2g	0.035
LTZ-8	32	280	80	2	0.77
LTZ-1	22	345	10	0.2	0.26
LTZ-0.25	22	345	2.5	0.05	0.26

SMALL HEALTH MONITOR PRODUCT



MF231a



MF231b



MF231c

MF231
Capacity:100g/3.5oz/64dwt/3pzt,200g/7oz/128dwt/6ozt
Graduation:0.01g/0.0005oz/0.01dwt/0.0005ozt,0.02g/0.001oz/0.02dwt/0.001ozt
High precision strain gauge sensor
0.6”(16mm) LCD digits
Auto zero: zero and tare
Auto –off or manual-off
Blue LCD backlight
With piece counting function
Low battery/over load indication
Power:2x3V lithium cell (CR2032)
Dimensions of the scale: 11.3x7x1.6cm
Dimensions of colour box:13.9x9.05x2.55cm
Packing volume:39.5x31.5x20cm 48pcs/ctn
N.W.:4.8KG G.W:8KG
20 feet container can hold 51744pcs



MF232a



MF232b



MF232c

MF232
Capacity:100g/3.5oz/64dwt/3pzt,200g/7oz/128dwt/6ozt
Graduation:0.01g/0.0005oz/0.01dwt/0.0005ozt,0.02g/0.001oz/0.02dwt/0.001ozt
High precision strain gauge sensor
0.6”(16mm) LCD digits
Auto zero: zero and tare
Auto –off or manual-off
Blue LCD backlight
With piece counting function
Low battery/over load indication
Power:2x3V lithium cell (CR2032)
Dimensions of the scale: 12x7x1.7cm
Dimensions of colour box:13.9x9.05x2.55cm
Packing volume:39.5x31.5x20cm 48pcs/ctn
N.W.:4.8KG G.W:8KG
20 feet container can hold 51744pcs



MF233a



MF233b

MF233
High precision strain gauge sensor
0.6”(16mm) LCD digits
Auto zero: zero and tare
Auto –off or manual-off
Blue LCD backlight
Low battery/over load indication
Power:2x1.5V AAA(not included)
Dimensions of the scale: 11.1x7.05x2cm
Dimensions of colour box:13.9x9.05x2.55cm
Packing volume:39.5x31.5x20.5cm 48pcs/ctn
N.W.:5.3KG G.W:9KG
20 feet container can hold 51744pcs



MF234a



MF234b



MF234c

MF234/MF235
Capacity:100g/3.5oz/64dwt/3pzt,200g/7oz/128dwt/6ozt
Graduation:0.01g/0.0005oz/0.01dwt/0.0005ozt,0.02g/0.001oz/0.02dwt/0.001ozt
High precision strain gauge sensor
0.6”(16mm) LCD digits
Auto zero: zero and tare,Auto –off or manual-off
Blue LCD backlight
With piece counting function
Low battery/over load indication
Power:2x1.5V AAA(not included)
MF234
Dimensions of the scale: 10.8x6.5x2.1cm(MF234)
Dimensions of colour box:12.7x8.7x3.4cm
Packing volume:39x29x26cm 48pcs/ctn
N.W.:4.8KG G.W:8KG
20 feet container can hold 48384pcs
40 feet container can hold 100224pcs
MF235
Dimensions of the scale: 8.3x9.8x2.3cm
Dimensions of colour box:11.3x13.2x3.8cm
Packing volume:49.5x30x27.5cm 48pcs/ctn
N.W.:5.3KG G.W:8.8KG
20 feet container can hold 29568pcs
40 feet container can hold 61824pcs



MF235a



MF235b



MF236a



MF236b



MF237



MF238

MF236
High precision strain gauge sensor
Capacity:200g/128.7dwt/6.432ozt
Division :0.1g/0.1dwt/0.005ozt
0.4"(10mm) LCD digits
Auto zero:auto –off or manual-off
Zero and tare
Low battery/over load indication
Power:1xPC 3V lithium cell (CR2032)
Dimensions of the scale: 10x6.5x1.9cm
Packing volume:46x31.5x31.2cm 48pcs/ctn
N.W.:4.6KG G.W:9.3KG
20 feet container can hold 30240pcs
40 feet container can hold 62832pcs

MF237
High precision strain gauge sensor
Capacity:500g/320dwt/16ozt
Division :0.1g/0.1dwt/0.005ozt
0.4"(10mm) LCD digits
Auto zero:auto –off or manual-off
Zero and tare
Low battery/over load indication
Power:1xPC 3V lithium cell (CR2032)
Dimensions of the scale: 11.8x7.8x1.6cm
Packing volume:53.5x34.3x25.3cm 48pcs/ctn
N.W.:4.1KG G.W:8.4KG
20 feet container can hold 28512pcs
40 feet container can hold 62208pcs

MF238
High precision strain gauge sensor
Capacity:500g/320dwt/16ozt
Division :0.1g/0.1dwt/0.005ozt
0.4"(10mm) LCD digits
Auto zero:auto –off or manual-off
Zero and tare
Low battery/over load indication
Power:1xPC 3V lithium cell (CR2032)
Dimensions of the scale: 11.5x7.8x2.4cm
Packing volume:46x34x30.5cm 48pcs/ctn
N.W.:5.1KG G.W:9.4KG
20 feet container can hold27552pcs
40 feet container can hold 56448pcs

Pocket scale series
Ultra thin design
Fits in you pocket
Low battery indication
Auto power off
Unique handheld design
Two lithium batteries
Multiple weighing units(g,oz,ozt,dwt)
Max:300g; d:0.1g
Max:150g; d:0.02g



MF239



MF240



MF241

Standard box:12.7x8.2x3.2cm
Carton size:34x26x28(60pcs/ctn)
20" FCL:67860pcs

Standard box:12x8.2x3cm
Carton size:32x26x26 (60pcs/ctn)
20" FCL:77640pcs

Standard box:12.3x7.6x3.3cm
Carton size:35x25x27(60pcs/ctn)
20" FCL:71100pcs
Display area 44x13mm



MF242



MF243



MF244

MF242
Tare and zero functions
Auto off feature
Easy to read 4.5 digital lcd display
Measures:grams,ounces,troy ounces, and penny weight,pcs(option)
Advanced parts counting function
Power sources:2xAAA batteries

Model	Capacity KG	Resolution G
MF242-50	50	0.01
MF242-100	100	0.02
MF242-150	150	0.05
MF242-200	200	0.1
MF242-300	300	0.1
MF242-500	500	0.1

MF243 Multiple weighing units
Fit your pocket
With counting function
Unique handheld design with large LCD(6digits)
Auto power off function
Low battery indicator
Power sources:3AAA batteries
Sealed key panel protects against spill&dust
Standard care with dual functions:as carrying case and to keep out the wind

Model	Capacity KG	Resolution G
MF243-50	50	50 0.01
MF243-100	100	0.01/0.02
MF243-150	150	0.05
MF243-200	200	0.1
MF243-300	300	0.1
MF243-500	500	0.1

MF244
Tare and zero functions
Auto off feature
Easy to read 4.5 digital lcd display
Measures:grame,ounces troy ounces,
And penny weight,pcs(option)
Stainless steel weighing pan
Backlight display
Power sources:2/4xAAA batteries

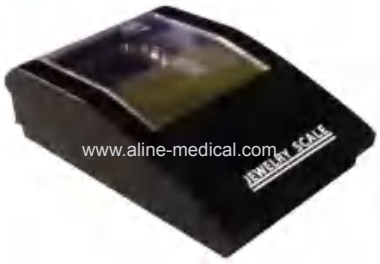
Model	Capacity KG	Resolution G
MF244-50	50	0.01
MF244-100	100	0.01/0.02
MF244-150	150	0.05
MF244-200	200	0.1
MF244-300	300	0.1
MF244-500	500	0.1



MF245

Tare and zero functions
Easy to read 5 digital lcd display
Measures:g,kg,lb,oz(option)
Power sources:6xAAA batteries

Model	Capacity KG	Resolution G
MF245-500	500	0.1
MF245-1000	1000	0.5
MF245-3000	3000	1
MF245-5000	5000	2



MF246

Tare and zero functions
Auto off feature
Easy to read 4.5 digital lcd display
Measures:grams,ounces,troy ounces, and penny weight ,pcs (option)
Stainless steel weighing pan
Backlight display
Power sources:2/4xAAA batteries

Model	Capacity KG	Resolution G
MF246-10	10	5
MF246-20	20	10
MF246-40	40	20
MF246-50	50	50



MF247a



MF247b



MF247c



MF248a



MF248b



MF248c

MF247
Body fat and hydration % differential resolution:0.1%
Memory:8 persons
Body fat measure range:4.0-45%
Body hydration measure range :37.8%-66%
Weight input effective at:2-150kg/4.4-330lb/4.4lb-24 stone
Weight input division :100g/0.2lb
Display screen:76x30mm
User modes:adult,child (age 10-99)
Power :2PCS 3V lithium batteries(CR2032)
Dimensions of the scale: 14.8x12x2.2cm
Dimensions of color box :19.6x15.6x3.6cm
Packing volume:40.5x33x22.5cm 24pcs/ctn
N.W.:2.3KG G.W:4.9KG
20 feet container can hold23520pcs
40 feet container can hold 47040pcs

MF248
Body fat and hydration % differential reaolution:0.1%
Memory:8 persons
Body fat measure range:4.0-45%
Body hydration measure range :37.8%-66%
Weight input effective at:2-150kg/4.4-330lb/4.4lb-24 stone
Weight input division :100g/0.2lb
Display screen:76x30mm
User modes:adult,child (age 10-99)
Power :2PCS 3V lithium batteries(CR2032)
Dimensions of the scale: 16.7x6.1x4.0cm
Dimensions of color box :20x8.8x5.6cm
Packing volume:48x28.5x23.5cm 24pcs/ctn
N.W.:2.7KG G.W:5.0KG
20 feet container can hold20736pcs
40 feet container can hold 41472pcs



MF249a



MF249b

MF249 ELECTRONIC HAND DYNAMOMETER
High precision power gauging,giving momentary digial read-out of gripping power
Auto capturing of maximum achieved grip power and display of the value.
Assessment of result according to age and gender group
Saving/storage &retrieval of result for different user indivduals
Measure grip power
Display grip power level
Store personal data
Store grip power record
Compare current record to the last one
Power :2PCS 1.5V lithium batteries(CR2032)
Dimensions of the scale: 19.6x13.1x3.6cm
Packing volume:36x26.7x32.5cm 12pcs/ctn
N.W.:4.2KG G.W:8.2KG
20 feet container can hold10584pcs
40 feet container can hold 22680pcs



MF250



MF251



MF252

MF250 Ultrasonic Body Scale
Weighing range:5kg-250kg,Min.value per division:±0.1kg
Height range to be measured: 70cm-200cm
Min.value of height per division:±0.1cm
IBP range:0-299mmHg(0-39.9kpa),Min.value of IBP:±4mmHg(±0.5kpa)
RESP range:40-180times/min,Min.value of RESP:≤±5%
Fat range:5-50%,Min.value of fat:≤±0.5%
Display type:LCD digits
Print:High-speed thermal printers, Automatic Paper function
Measure speed:5seconds/people
Weight:40kg
Size:55x36x240cm
Power:AC220V 50Hz

MF251 Ultrasonic Body Scale
Major functions:Weigh,Height,Countdown function display,Voice broadcast
Weighing range:5kg-160kg,Min.value per division:±0.5kg
Height range to be measured: 80cm-198cm,Min.value of height per division:±0.5cm
Display type:LED digits
Print:High-speed thermal printers, Automatic Paper function
Measure speed:5seconds/people
Weight:45kg
Height:240cm
Power:160V-250V

MF252 Ultrasonic Body Scale
Major functions:Weigh,Height,Countdown function display,Voice broadcast
Weighing range:5kg-160kg,Min.value per division:±0.5kg
Height range to be measured: 80cm-198cm,Min.value of height per division:±0.5cm
Display type:LED digits
Print:High-speed thermal printers
Measure speed:400peoples/hour
Weight:18kg
Height:38x35x143cm
Power:AC160V-250V,50Hz



MF253



MF254



MF255



MF256



MF257

MF253 Electronic Weighing Balance
(Attached with height gauge)
Capacity:150kg
Division:200g
The range of height to be measured:70-190cm
Min.Division:0.5cm

MF254 Electronic Weighing Balance
(Attached with height gauge)
Capacity:150kg
Division:200g
The range of height to be measured:
70-190cm,70-210cm
Min.Division:0.5cm

MF255 Electronic Body-weight Balance
Max.weighing:200kg
Value per division:100g
Height range to be measured:
70-190cm
Value of height per division:0.5cm
Load platform area:32x27cm
Measurement:58.5x28x96.5cm
Weight:11.8kg
Power Supply:AC220V DC6V

MF256 Electron tong penetration resistance meter
Max.weighing:1200N
Minimum weight:20N
Value of height per division:1N
Load platform area:37x27cm
Measurement:58.5x28x96.5cm
Weight:10.4kg
Power Supply:AC220V DC6V

MF257 Electronic Body-weight Balance
Max.weighing:200kg
Value per division:100g
Height range to be measured:80-210cm
Value of height per division:0.5cm
Load platform area:37.5x27.5cm
Measurement:53.5x27.5x94cm
Weight:13kg
Power Supply:AC220V DC6V



MF258

MF258 This folding health scale has two functions,the body weight and height measuring. You can use it as follows.
1.By means of its two small wheels,the health scale can be moves as shown in picture 1.
2.Erect the standard and turn it clock-wise for 180°so that the locking nut is just upon the locking screw.Tighten up the locking nut and the scale will be ready to work.
3.The dial pointer should be at zero before the scale is used.If there is any deviation,adjust it by the zero-adjust screw under the dial.
4.When measuring height,the leveller should be pulled out at right angle with measuring standard.Stretch the inner tube to its full length sufficient for a range of 70-126 cm.The reading can be obtained from the point where the graduation of the mner tube-coincides with the uppre flange edge of the medium tube.In case the height is over 126 cm.Pull out the middle tube for a measuring range of 126-190 cm,and the reading is to be taken from the point where the graduation of the middle tube and the upper flange edge of the outer tube join together.
Specifications:
Body weighing:capacity:120kg,Min.Division:0.5kg
Height measuring:Measuring range:70-190cm
Min.Division:0.5cm
Tolerance:±0.5cm
Size of platform:28x38cm
Dimensions:95x30x29cm
Weight:14kg



Available color:black,grey,blue,
red,green,yellow

MF259

MF259 Body Weight Balance(Attached with height gauge)
Type RGZ-120/160 Body-weight

Type	RGZ-120	RGZ-160
Max.weighing	120kg	160kg
Value per division	0.5kg	0.5kg
Height range to be measured	70-190cm	70-190cm
Value of height per division	0.5cm	0.5cm
Load platform area	37.5x27cm	37.5x27cm
Measurement	69.5x28.6x93cm	69.5x28.6x93cm
Weight	24kg	24kg



MF260



MF261



MF262

MF260 Body Weight Balance(Attached with height gauge)
Type RGT-140/160/200 Body-weight

Type	RGT-140	RGT-160/200
Max.weighing	140kg	160kg
Value per division	0.1kg	0.1kg
Height range to be measured	70-190cm	80-210cm
Value of height per division	0.5cm	0.5cm
Load platform area	37.5x27cm	37.5x27cm
Measurement	56.6x43.7x131.7cm	56.6x43.7x131.7cm
Weight	24kg	24kg

MF261 Body Weight Balance(Attached with height gauge)
Type RGT-200A Body-weight

Max.weighing	200kg
Value per division	0.1kg
Height range to be measured	70-200cm
Value of height per division	0.5cm
Load platform area	37.5x27cm
Measurement	53x43.8x148cm
Weight	15kg

MF262 Mechanical column scale with BMI display
It is one of the first mechanical column scales which,in addition to displaying the weight,also displays the respective nutritional condition of the patient with the BMI function.When the patient step on the scale,a BMI disc of contrasting colour is set in motion below the very precise weight has been determined,it is easy to read the BMI range which,with contrasting colours,is split up into underweight,normal and overweight as well as adiposity(abnormally overweight).A flat tread area and practical transport castors are further advantages of the seca 755.It can also be converted into a complet measuring and weighing station by fitting the optional measuring rod seca 220.
Capacity:160kg
Graduation:500g
Optional:Measuring rod seca 220,kg/ibs versi



MF263a



MF263b MF263c

MF263 Double ruler personnel weighing scale
Capacity:140kg,160kg,200kg
Division:100g
Height range to measured:75-200
Min value of height per division:0.5cm
G.W.:17kg,NW:15kg
Packing size:148x51x15cm



MF264

MF264 Wheelchair scale
Capacity:160kg,200kg
Division:100g
G.W.:35kg,NW:25kg
Size:87x56x107cm



MF265

MF265 Wheelchair digital scale
Capacity:200kg
Division:100g
G.W.:35kg,NW:25kg
Size:87x56x97cm



MF266



MF267



MF268

MF266 Children Balance(Attached with Height Gauge)

Max.weighing	50kg
Value per division	0.05kg
Height range to be measured	60-160cm
Height range in a sitting position to be measured	38-100cm
Value of height per division	0.5cm
Load platform area	37.5x27cm
Measurement	56.6x54x75cm
Weight	20kg

MF267 Children Balance(Attached with Height Gauge)

Max.weighing	50kg
Value per division	0.05kg
Height range to be measured	60-160cm
Height range in a sitting position to be measured	38-100cm
Value of height per division	0.5cm
Load platform area	37.5x27cm
Measurement	69.5x28.6x83.5cm
Weight	15kg

MF268 Children Balance(Attached with Height Gauge)

Max.weighing	50kg
Value per division	200g
Height range to be measured	60-160cm
Height range in a sitting position to be measured	38-100cm
Value of height per division	0.5cm
Load platform area	37.5x27.5cm
Measurement	69.5x28.5x83.5cm
Weight	23kg



MF269

MF269 Cartoon digital baby scale
The first innovated cartoon baby scale in the world. Only 3.4 lbs, it's extremely lightweight – also ideal for the traveling nurse!
The unique scale for weighing infant!
Equipped with four high precision sensors.
The newest cartoon and durable design to satisfy baby's vision require.
Capacity: 55 lbs/ 25 kg
Readability: 0.5 oz/ 10g
Tray Dimensions: 22" x 12"
Overall Dimensions: 24-1/2" x 14" x 3-3/8"
Extra large weight tray to accommodate babies of all sizes – both sitting and reclining
Weight Unit: kg/ lb/ oz
On/Off/Tare, unit and music buttons
Hold / release function
Tare function to remove weight of a pad or blanket
Music function can attract baby's attention to reduce infant swing.
Easy to read 2.5" large LCD display
LCD display with white backlight to make you read more easier at night
Enclosed measuring tape can easily measure infant's height at any time.
Thirty minutes auto-off can give you enough time to prepare to weight
4pcs AA battery , low-battery indicator features



MF270

MF270 Electronic Baby Balance
Display:LCD,Kilograms and Pounds Interconvertible
Max Capacity:15kg
Division value:5g
Load platform area:55x32.5cm
Power:220V,50Hz



MF271

MF271 Electronic Baby Balance
Display:LCD,Kilograms and Pounds Inter-convertible
Max Capacity:20kg
Division value:20g,10g,5g
Power:4x1.5V 5#cells



MF272

MF272 Electronic Baby Balance
Display:LCD,Kilograms Double Display
Max Capacity:15kg
Division value:5g
Power:2x1.5V 1#cells



MF273

MF273 Electronic Baby Balance
Display:LCD,Kilograms
Max Capacity:20kg
Division value:10g
Power:2x1.5V 1#cells



MF274

MF274 Electronic infant scale
Capacity:20kg
Division:10g/20g
G.W:4kg,N.W:3.2kg
Packing size:54.5x33x15.1cm



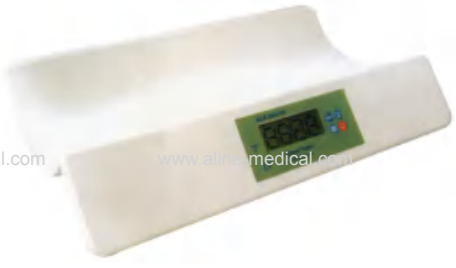
MF275

MF275 Electronic infant scale
Capacity:30kg
Division:10g/20g
G.W:4kg,N.W:3.2kg
Packing size:54.5x33x15.1cm



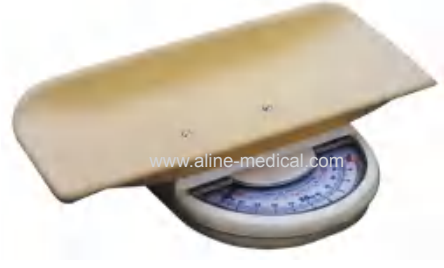
MF276

MF276 Electronic infant scale
Capacity:20kg
Division:10g/20g
G.W:4kg,N.W:3.2kg
Packing size:54.5x33x15.1cm



MF277

MF277 Electronic Baby Balance
Display:LCD,Kilograms Double Display
Max Capacity:20kg/44lb,Division value:10g/0.5lb
Min weight:200g,Humidity:90%RH,G.W:4kg,N.N.W:3.3kg
Power:6F22ND 9V,Work temperture:5-40℃



MF278

MF278 Baby Balance
Max Capacity:20kg
Division value:0-10kg,d=50g,
10-20kg,d=100g



MF279

MF279 Baby Balance
Max.weighing:15.5kg/16kg,Weight:11.7kg
Value per division:10g,5gLoad platform area:500x315mm
Measurement:500x335x260mm



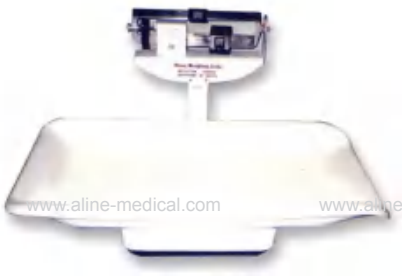
MF280

MF280 Baby Balance
Max.weighing:20kg, Weight:3.5kg
Value per division:0-10kg,d=50g,10-20kg,d=100g
Load platform area:545x270mm
Measurement:545x331x153mm

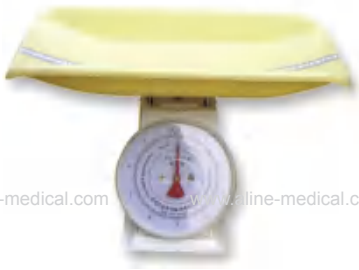


MF281

MF281 Baby Balance
Max.weighing:20kg, Weight:2.8kg
Value per division:0-10kg,d=50g,10-20kg,d=100g
Load platform area:520x260mm
Measurement:535x310x90mm



MF282



MF283



MF284

MF282 Baby Balance(25kg)

MF283 Baby Balance(10kg)

MF284 Infant scale
Capacity:10kg
Division:50g
G.W:3.5kg,N.W:2.5kg
Size:54.5x29x33cm
Tray size:54.5x27cm





MF285a

MF285 Hook-type Scale
Precision:5kgx20g,10kgx50g,25kgx100g,50kgx200g,100kgx500g
Serves as a baby-scale,when use together with a baby-bag.



MF285b



MF286

MF286 Baby Balance(25kgx100g)



MF287

MF287 Hook-type Scale for Baby
Max.weighing:25kg
Minimum weight:1kg
Value per division:100g
Measurement:885x61x400mm
Weight:4.7kg



Indicator-A
Size:255x200x125mm

Indicator-A
Size:265x160x75mm

MF288

Price computing,counting&weighing scale selectable
Auto zero tracking
Two power sources:rechargeable battery and AC adaptor selectable
Back light:1/2000-1/30000
High accuracy load cell
Large LCD display
Indicator can be revolved 180° (for TCS xxx A)
Platter size:400x500mm,450x600mm, 500x700mm(optional)

Model	Capacity KG	Resolution G
TCS060A/P TCS060C/P	60	10/20
TCS075A/P TCS075C/P	75	10
TCS150A/P TCS150C/P	150	20/50
TCS300A/P TCS300C/P	300	50/100
TCS060A/C TCS060C/C	60	10
TCS120A/C TCS1200C/C	120	20
TCS300A/C TCS300C/C	300	50
TCS060A/W TCS060C/W	60	10
TCS120A/W TCS120C/W	120	10
TCS300A/W TCS300C/W	300	50/100
TCS600A/W TCS600C/W	600	200
Operating temperature	0-40℃(32-104° F)	
Power source	Recharge battery or AC/DC	

Adapter 10v/500Ma(optional)



MF289

MF289
Capacity:65kg
Division:100g
Measurement:60x48x20cm



MF290

MF290 Balance
Max.weighing:50/100kg
Value per division:50kg,d=100g,100 kg,d=200g
Load platform area:40x30cm
Measurement:61x31x99cm
Weight:25kg



MF291

MF291 Balance
Max.weighing:200/500kg
Value per division:200kg,d=500g,500kg,d=1000g
Load platform area:60x45cm
Measurement:91x54.5x123cm
Weight:58kg



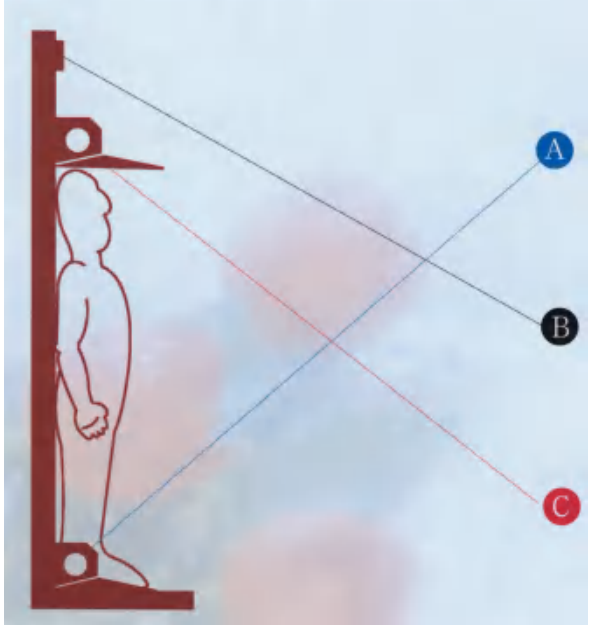
MF292a



MF292b



MF292c





MF292d

MF292 Stature meter
Stature scope to be measured:0-200cm
Division value:0.1cm
Self-weight:0.133kg
1.First of all,laying the height scale on the flat floor,then,pulling out the scale to the scale mark"0",and aligning the red"0 level" of the scale window.
2.According to the place noted in the drawing,sticking the dead plate to the wall with supplied screws.
3.Pulling the rule towards the top of the head of the person,and pulling down the measuring plate to the top of the person's head.Thus the height can be measured.



MF293

MF293 Stature Gauges
Stature range to be measured:60-200cm
Height range in a sitting position to be measured:40-120cm
Value per division:0.1cm



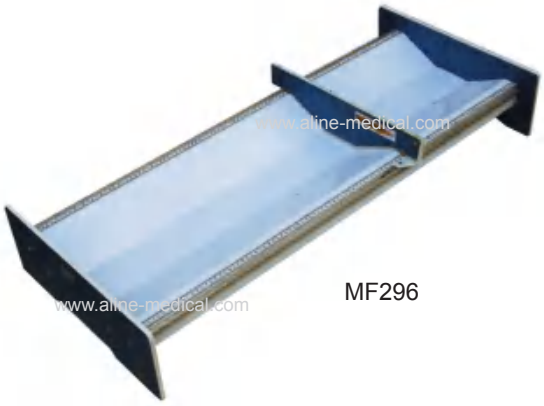
MF294

MF294 Stature Gauges
Stature range to be measured:60-200cm
Value per division:0.1cm



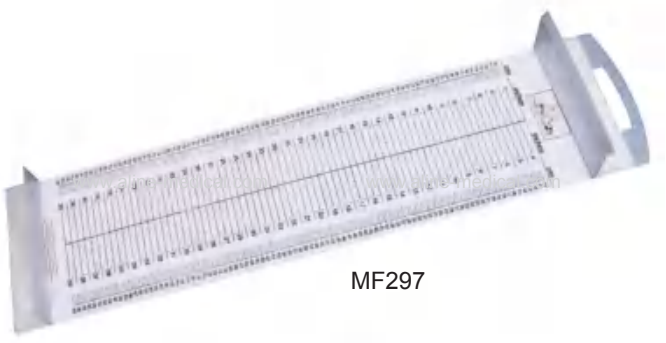
MF295

MF295 Horizontal Type for Baby
Stature range to be measured:6.5-99cm
Value per division:0.1cm



MF296

MF296 Horizontal Type for Baby
Stature range to be measured:6.5-98cm
Value per division:0.1cm



MF297

MF297 Horizontal Type for Baby
Stature range to be measured:20-99cm
Value per division:0.5cm



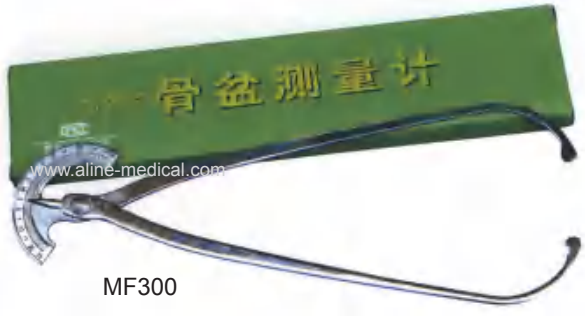
MF298

MF298 Infant height bed



MF299

MF299 Stainless steel Measure instrument



MF300

MF300 Gauge for Ilium
Measurement:34.2x8.2x1.2cm
External diameter range to be measured:0-50cm
Internal diameter range to be measured:0-25cm

BALANCE INSTRUMENTS



MF301

Demo tray balance
max capacity:200g
graduation:0.2g
dia of tray 134mm
dimension:354x134x220mm



MF302

model	MF302a	MF302b	MF302c	MF302d
max capacity	100g	200g	500g	1000g
graduation	0.1g	0.2g	0.5g	1g
reading	5g	5g	10g	10g
dia.of tray	84mm	84mm	112mm	112mm



MF303

max capacity:200g
graduation:0.1g
dimension:230x125x138mm
N.G:0.8kg



MF304

It is used in corporation,hospital,agriculture,chemical,school.

model	max capacity	graduation	staff guage	dimension	N.W
MF304-1	100g	0.1g	5g	210x84x135mm	0.7kg
MF304-2	200g	0.2g	5g	210x84x135mm	0.8kg
MF304-5	500g	0.5g	10g	300x120x175mm	1.6kg
MF304-10	1000g	1g	10g	350x134x185mm	2.5kg
MF304-20	2000g	1g	20g	400x170x245mm	8.5kg
MF304-50	5000g	2g	50g	520x210x285mm	16kg
MF304-100	10000g	5g	100g	580x240x320mm	24kg
MF304-200	20000g	10g	100g	670x275x320mm	36.5kg
MF304-20a	2000g	1g	20g	410x250x145mm	2.5kg



MF305

Student Balance
The product is widely used for weighing in manufacturing and mining industries, chemical works,school labs and calssrooms,etc

Capacity	200g
Readability	20mg
Size	300x144x295mm
weight	1.8kg



MF306

Physics balance
it is used to teach,test and weigh in middling school, higher school and corporation.

MODEL	MF306a	MF306b
max capacity(g)	500	1000
graduation(mg)	20	50
error (div)	< 1	< 1
cursor scale(mg)	20	20
dia of tray(cm)	12	13.4
dimension	40x17.2x39.2	42x16.2x40



MF307

weight	quantity of weight										
	5g	10g	20g	50g	100g	200g	500g	1000g	2000g	5000g	10000g
100g	1	1	2	1	-	-	-	-	-	-	-
200g	1	1	2	1	1	-	-	-	-	-	-
500g	-	1	2	1	2	1	-	-	-	-	-
1000g	-	1	2	1	2	1	1	-	-	-	-
2000g	-	1	2	1	2	1	1	1	-	-	-
5000g	-	-	-	1	1	2	1	2	1	-	-
10000g	-	-	-	-	1	2	1	2	1	1	-
20000g	-	-	-	-	1	2	1	2	1	1	1



MF308

Cigarette Balance
Capacity:60g
Readability:0.1g
Size:305x98x155mm
weight:0.98kg



MF309

MF309 Triple Beam Balance
The MF309a and MF309b are Single-pan balance of unequal arm type with 3 beams.The maximum capacity is 610 grams without extra attachment weights or 2610 with the supplied attachment weights.
MF309 Triple Beam Balance with Tare

Model	MF309a	MF309b
Capacity	2610g	2610g
Readability	0.1g	0.1g
Tare range		0-225g on MF309b only
Beam calibration	Front Beam:10x0.1g, 2 Beam:500x100g,3 Beam:100x10g	
Damping	Magnetic	
Pan size	150mm(6")diameter,Stainless steel	
Overall size	470x160x150mm(18.5"x6.2"x6")	
Packing dimensions	515x385x180mm(4pcs.)	
Gross wt.	14kg(4pcs.)	



MF310



MF311

MF310 Double Beam Balance
Single-pan balance is of unequal arm type with two scales.It is easy to operate.The weight of 100g range can be read directly and the maximum capacity is 200g with the supplied attachment weight.
It is widely used for weighings in manufacturing and mining industries,pharmaceutical companies,medical units,chemical works,school labs,etc.
Taring,Double scales direct reading
Capacity:200g
Sensitivity:200mg
Main scale range:0-90gx10g
Front scale range:0-10gx0.2g
Pan diameter:89mm,stainless steel
Packing dimensions:420x280x240mm(10pcs.)
Gross weight:11kg(10pcs.)

MF311 Quadruple Beam Balance
Single-pan balance is of unequal arm type with 4 beams.The maximum capacity is 311 grams and the readability is 0.01g.
Capacity:311g
Readability:0.01g
Beam calibration:front beam:1x0.01g,
2 beam:10x1g,
3 beam:100x10g,
4 beam:200x100g
Damping:Magnetic
Pan size:100mm(4")diameter,stainless steel
Density platform:75mm(3")diameter,adjustable height
Overall size:370x300x137mm(14.5"x11.8"x5.4")
Packing dimensions:720x450x380(4pcs.)
Gross weight:10kg(4pcs.)



MF312



MF313



MF314

it is used in corporation,scientific research organization and lab.

model	MF312a	MF280b
max capacity	200g	200g
graduation	1mg	1mg
range of staff guage		1-10mg
range of weight	10-990mg	
dia. of tray	75mm	75mm
height of tray	130mm	195mm
dimension	390x280x500mm	390x285x485mm
N.W	13kg	11.5kg

it can be used in corporations,scientific research organizations and labs.

model	MF313a	MF313b
max capacity	200g	200g
graduation	0.1mg	0.1mg
optics reading	0.1-10mg	0.1-10mg
range of weight	0.01-199.99g	10-990mg
dia of tray	75mm	75mm
dimension	440x400x500mm	440x400x500mm
N.W	16kg	15kg

Mine balance
it is used to analysis and weight the mayerial,medicine and costly material in corporation,food organization,chemical company and school.

max capacity	200g
graduation	10mg
dia of tray	85mm
heigth of tray	220mm
dimension	370x210x392mm
N.W	8.4kg

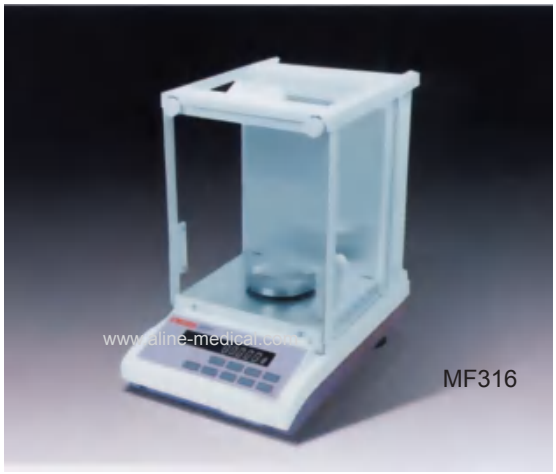
ELECTRONIC BALANCE SERIES



MF315

MF315 Electronic analytical balance is the most advanced electronic balance.accuracy ,stability ,multifunction and automation of performance satisfy the requirements of all quality analysis in laboratories. The balance employs high performance single-chip MF315 as the microprocessor control and is provide with standard signal output interface for directly connecting with printers,computers and other equipment.
Taring ,Accumulating ,Fault alarm,Hanging weighing,Auto-calibration,
Range transfer,Adjustable integrated time ,Adjustable sensitivity,
Units selection ,Counting,Print,RS 232C ,output interface

Model	MF315a	MF315b	MF315c	MF315d	MF315e	MF315f
Capacity	0-110g	0-110g	0-160g	0-200g	0-210g	0-60/60-210g
Reading accuracy	0-100g	0.1mg				0.1/1mg
Pan diameter		Φ80mm				
Output interface			RS232C			
Overall dimensions			324x217x335mm			
Net weight			7kg			
Power supply			220V/50Hz,110V/60Hz			



Electronic analytical balance is the most advanced electronic balance. accuracy ,stability ,multifunction and automation of performance satisfy the requirements of all quality analysis in laboratories. The balance employs high performance single-chip MCS-51 as the microprocessor control and is provide with standard signal output interface for directly connecting with printers,computers and other equipment.

FUNCTION:

Taring ,Accumulating ,Fault alarm,Hanging weighing,Auto-calibration
Range transfer,Adjustable integrated time
Adjustable sensitivity,Units selection
Counting,Print,RS 232C ,output interface

Model	MF316a	MF316b	MF316c	MF316d	MF316e
Capacity	0-100g	0-120g	0-200g	0-300g	0-500g
Reading accuracy		1mg			
Pan diameter	Φ80mm		110mm		
Output interface		RS232C			
Overall dimensions		324x217x335mm			
Net weight		7kg			
Power suppl	220V/50Hz,110V/60Hz				



Quick response
Multi-application program
Easy to operate
Display with bias light and clear readings in any light
Build-in RS 232 serial PORT
Timing automatic calibration to eliminate measurement errors
FB series electronic balance is an electronic analytical balance with an all new structure and functions of automatic internal calibration and timing calibration .It is characterized by its quick response ,stable readings and complete functions in a novel style.the balance has been widely used in scientific research institutes,colleges and universities,industrial and mining enterprises and other fields for precision weighing and mass analysis.It is an ideal instrument to measure mass
Weighing range:0-210g
Margin of error: ± 0.0005g for a weighing range of 0-50g
± 0.0010g for a weighing range of 50-200g
Repeatability error (standard deviation):0.3mg
Linearity error: ± 0.5mg
Actual Scale Division Value(d):0.1mg
Pan diameter:Φ90mm
Way of calibration:automatic internal and external calibration
Output interface :RS232
Overall dimensions:477x216x298mm
Power :220V 50hz/15W
Operating temperature:20℃ ± 5℃
Operating relative humidity:50%-70%
Weigh:about 9kg



Auto shut off (option)
Tare and zero functions
Auto calibration
Large digital LCD/LED display
Stainless weighing pan
Counting function
With rs 232(option)
Measures : g,ct,oz,tl,tola,gn,dwt
14units(option)
Resolution:1/30000-1/200000
Power sources:6xAA batteris or AC/DC adaptor

MODEL	CAPACITY (g)	RESOLUTION(g)
MF318-50	50	0.001
MF318-100	100	0.005,0.002,0.001
Net /gross weight	1350/1500g	
Package	Standard carton:34x22x14cm^3	
	6 Units in one box:47.5x38.5x45cm^3	
Power supply	AC/DC 9V 150mA	
	or 6xAA batteries/Recharge battery	
Platter size	Round 40mm dimeter	



Electronic Analytical Balances
Using electromagnetic force compensation weighing Transducer with High-precision,VFD fluorescent display,built in calibration weight,so it has automatic inner calibration.The balances is high precision,weighing fast,display stability,operating is convenient and agile,etc.

Model	MF319a	MF319b	MF319c
Capacity(g)	110	160	210
Readability(mg)	0.1		
Linearity error(mg)	⩽ ± 0.2		
Reproducibility(mg)	⩽0.1		
Calibration way	Intermal Calibration with built in Calibration weight		
Data output	RS232 Interface		
Tare range(g)	0-110g	0-160g	0-210g
Pan size(mm)	Φ85		
Housing dimensions(mm)	412x220x310		
Power supply	220VAC		



MF320a



MF320b

Auto shut off ,Auto calibration
Auto zero tracking,Auto backlight
Low battery indication.
Meaaures:kg/g/lb/oz conversion for 4 units(option)
Or g/oz/dwt/gn/tl/ozt/pcs.for 8 units conversion(option).
Large LCD (6 DIGITS 15mm hight)
Stainless steel weighing pan.
1/2000-1/60000 division available.

Model number	capacity	division
MF320-150	150g	0.01g
MF320-300	300g	0.01/0.02g
MF320-750	750g	0.05g
MF320-1500	1500g	0.10g
MF320-500A	500g	0.10g
MF320-1000A	1000g	0.2g
MF320-2500A	2500g	0.5g
MF320-1000B	1000g	0.5g
MF320-2000B	2000g	1.00g
MF320-3000D	3000g	1.00g

Platter 145x145mm or Φ115mm
Net weight /gross weight 460/650g
Package Standard carton:22x16x5(cm³)
12 units in one box:48x35x20(cm³)
Operating temperature 0℃-40℃(32° F-104° F)



MF321a



MF321b

Auto power off to save battery life
Auto calibration from keypad,Auto backlight.(option)
Low battery indicator.
Measures:kg/g/lb/oz conversion for 4units (optional).
Or g/oz/dwt/gn/tl/ozt/pcs.for 8 units conversion(optional).
Large.clear LCD display
Large stainless steel weighing pan
1/2000-1/60000 division available,With rs 232(option)

Model number	Capacity	Division	Platter size	windshield
MF321-150	150g	0.01g	Φ100mm	YES
MF321-200	200g	0.01g	Φ100mm	YES
MF321-300	300g	0.01g	Φ100mm	YES
MF321-600	600g	0.01g	Φ100mm	YES
MF321-1000	1000g	0.1g	140x165mm	NO
MF321-1200	1200g	0.1g	140x165mm	NO
MF321-1500	1500g	0.1g	140x165mm	NO
MF321-2000	2000g	1g	140x165mm	NO
MF321-3000	3000g	1g	140x165mm	NO
MF321-6000	6000g	1g/2g	140x165mm	NO
MF321-10000	10000g	1g/2g	140x165mm	NO

Net .gross weight 510/620
package Standard carton:29x22x14(cm³),8 Units in one box:60x45x45(cm³)
Operating temp 0-40℃(32-104° F)
Power source 6xAA Size batteries or AC/DC Adapter 9V/100Ma(optional)



MF322

Electronic Analytical Balances
Electronic Precision Balances
Using electromagnetic force compensation weighing transducer with high-precision.
So it has stability and reliability of the metrological performance,LCD display,8 weighing unit modes changing,counting,etc.It is well over for the functions compare with price.

Model	MF322a	MF322b	MF322c	MF322d	MF322e	MF322f
Capacity(g)	110	160	200	120	200	300
Readability(mg)	0.1			1		
Linearity error(mg)	⩽±0.2			⩽±2		
Reproducibility(mg)	⩽0.1			⩽1		
Calibration way	External Calibration with a standard weight					
Data output	RS232 Interface					
Tare range	0-110g	0-160g	0-200g	0-120g	0-200g	0-300g
Pan size(mm)	Φ85mm					
Housing dimensions(mm)	315x225x330					
Power supply	220VAC					



MF323

Auto shut off (option)
Auto calibration,Auto zero tracking.
Low battery indication
Measures:kg/g/lb/oz conversion for 4 units
Or g/ct/oz/dwt/gn/tl/ozt/pcs.for 8 units conversion
Large LCD double display
Large stainless steel weighing pan
Net weight /stability indication.
Backlight or LED display(option).
1/5000-1/60000 division available

Model number	Capacity	Division
MF323-150	150g	0.01g
MF323-200	200g	0.01
MF323-300	300g	0.01/0.02g
MF323-600	600g	0.1g/0.02g
MF323-1200	1200g	0.1g
MF323-600A	600g	0.1g
MF323-1200A	1200g	0.1/0.2g
MF323-1000B	1000g	0.5g
MF323-3000B	3000g	1g
MF323-6000	6000g	1g/2g
MF323-10000	10000g	2g/5g

platter:140x165/Φ100mm
Net weight/gross weight:490/650g
Package Standard carton:29x22x14cm³
8 units in one box:60x46x46cm³
Operating temperature:
0-40℃(32-104° F)
Power source:6xAA Size dry cell batteries(no included),Or 9V AC/DC Adapter(option)



MF324

Electronic Precision Balances

Model	MF324a	MF324b	MF324c	MF324d	MF324e
Capacity(g)	120	200	300	400	500
Readability(g)	0.001				
Linearity error(g)	⩽±0.002				
Reproducibility(g)	⩽0.001				
Calibration way	External Calibration with a standard weight				
Data output	RS232 Interface				
Tare range(g)	0-120	0-200	0-300	0-400	0-500
Pan size(mm)	Φ130(with a glass breeze break)				
Housing dimensions(mm)	310x210x165				
Power supply	220VAC				



MF325

10G/0.001G,20G/0.002G/0.001G,
30G/0.002G,100G/0.005
Large LCD display with backlight
g/oz/dwt/ozt/ct/gn/mg/pcs.
Calibration weight
Power soure:3xAAA size batteries

Model	Capacity KG	Resolution G
MF325-10	10	0.001
MF325-20	20	0.002,0.001
MF325-30	30	0.002
MF325-100	100	0.005





MF326 electronic precision balance is a balance essential to laboratory quality analysis and quality control .It is characterized by wide range and high accuracy.
Itcan meet the requirements of fine weighing in various operating environments.the balance is provide with standard signal output interface for directly connecting with printers, computers and other equipment
Taring ,Accumulating,Fault alarm,Auto-calibration,Print ,RS232C output interface

Model	MF326a	MF326b	MF326c	MF326d	MF326e	MF326f	MF326g
Capacity	0-1100G	0-2100G	0-2100G	0-3100G	0-4100G	0-5100G	0-6100G
Reading accuracy			10mg		100mg		
Pan diameter			Φ160mm			200mmx180mm	
Output interface			RS232C				
Overall dimensions			360mmx230mmx77mm				
Net weight			5kg			8kg	
Power supply			220V/50hz				

MF327 electronic balance is new advanced product consisting of a strain gauge transducer and a microcomputer .It adopt SMT surface technology and LCD display ,with a high stability and multifunctions. It uses AC/DC current and have an over-load and low-voltage alarm system
High sensitivity ,Automatic calibration with automatic calibration program
Full range tare,Standard output interface,Unites selection ,Quick response,Automatic zero track

Model	MF327a	MF327b	MF327c	MF327d	MF327e	MF327f
	MF327g	MF327h	MF327i	MF327j	MF327k	
Capacity	0-100g	0-200g	0-400g	0-800g	0-1200g	0-600g
	0-2000g	0-3000g	0-6000g	0-10000g	0-20000g	
Reading accuracy	10mg		100mg	1g		
Pan diameter	Φ110mm			175x165mm		Φ130mm
	175x165mm		280x250mm			
Overall dimensions	245x185x66mm		280x195x90mm		432x270x110mm	
Net weight	1.8kg			2.8kg		
Power supply	AC220V ± 10% DC9V					







Auto shut off (selectable),Auto backlight (selectable)
Rugged plastic housing,with large,LCD unit,digit height 15mm
Easy operation by the key.
Socket for charger on the side
Low battery indiction
Measures:kg/g/ib/oz for 4 units or 8unit(option)
specifications

Model number	Capacity (g)	Division (g)	Platter
MF328-C-150	150	0.01	Φ98mm
MF328-C-200	200	0.01	Φ98mm
MF328-C-300	300	0.01	Φ98mm
MF328-C-600	600	0.01	Φ98mm
MF328- A/B -600	600	0.1	175x160mm
MF328- A/B -1200	1200	0.1	175x160mm
MF328- A/B -2500	2500	0.1	175x160mm
MF328- A/B -1000	1000	0.5	175x160mm
MF328- A/B -2000	2000	1	175x160mm
MF328- A/B -3000	3000	1	175x160mm
MF328- A/B -5000	5000	1	175x160mm
MF328- A/B -6000	6000	1	175x160mm
Operating temperature	0-40℃(32-104° F)		
Power	6xAA sizebatteries or AC/DC Adaptor 9v/100mA(no included)		



Auto shut off
Auto calibration
Auto zero tracking
Auto backlight
Low battery indicator
Measure:kg/g/lb/oz(optional)
Large LCD(size:98x39mm)
Pure stailess steel
1/2000-1/30000 division available
It possess the function ot anti-humidy

Model number	Capacity	division
MF329-500	500g	0.1g
MF329-1000	1000g	0.1/0.2/0.5g
MF329-2000	2000g	0.1-1g
MF329-3000	3000g	0.1g
MF329-5000	5000g	1g
platter	165x175mm	
Net /gross weight	2.2kg/2.8kg	
Package	Standard carton:25x20x8.5(cm^3)	
Operating temperature	0-40℃(32-104 F)	
Power source	6xAA Size batteries or AC/DC Adapter 9V/100mA(optional)	



Electronic Precision Balance Using electromagnetic force compensation weighing Transducer with high-precision,LCD display,Weighing is fast and stability.Operaating convenience and agility,8 weighing unit modes changing,counting etc.

Model	MF330a	MF330b	MF330c	MF330d	MF330e	MF330f
Capacity(g)	200	300	400	500	1000	1500
Readability(g)	0.01					
Linearity error(g)	⩽ ± 0.02					
Reproducibility(g)	⩽0.01					
Calibration way	External Calibration with a standard weight					
Data output	RS232 Interface					
Tare range(g)	0-200	0-300	0-400	0-500	0-1000	0-1500
Pan size(mm)	Φ150					
Housing dimensions(mm)	310x210x93					
Power supply	220VAC					



MF331

Electronic Precision Balance
Using electromagnetic force compensation weighing Transducer with high-precision,VFD fluorescent display.It has high capacity,high accuracy,easy to operate,automatic change for the Weighing unit modes and accuracy,etc.


Model	MF331a	MF331b	MF331c
Capacity(g)	2000/500	6100	6100/500
Readability(g)	0.01/0.001	0.1	0.1/0.01
Linearity error(g)	±0.02/±0.003	±0.2	±0.2/±0.03
Calibration way	External Calibration with a optional standard weight		
Tare range(g)	0-2000	0-6100	0-6100
Pan size(mm)	Φ130	248x185	
Housing dimensions(mm)	320x260x180	320x260x110	
Power supply	220VAC		



MF332

Electronic Precision Balance
Using electromagnetic force compensation weighing Transducer with high-precision,VFD fluorescent display.It has high capacity,high accuracy,easy to operate,etc.


Model	MF332a	MF332b
Capacity(g)	2100	3100
Readability(g)	0.01	
Linearity error(g)	⩽±0.03	
Reproducibility(g)	⩽0.01	
Calibration way	External Calibration with a optional weight	
Data output	RS232 Interface	
Tare range(g)	0-2100	0-3100
Housing dimensions(mm)	320x260x110	
Power supply	220VAC	



MF333

Electronic Precision Balance
Using high precision Strain Gauge,LED display,so it has stability and reliability for the weighing performance,weighing unit modes changing for g-ct-oz and counting functions.It is well over for the functions compare with price.


Model	MF333a	MF333b	MF333c	MF333d
Capacity(g)	200	300	400	500
Readability(g)	0.01			
Linearity error(g)	⩽±0.02			
Reproducibility(g)	⩽0.01			
Calibration way	External Calibration with a standard weight			
Data output	RS232 Interface			
Tare range(g)	0-200	0-300	0-400	0-500
Pan size(mm)	Φ130			
Housing dimensions(mm)	230x178x66			
Power supply	220VAC			



MF334

Electronic General Balance
Using Strain Gauge,LED display,Operating is convenient and agile.Weighing performance is stability and reilability.

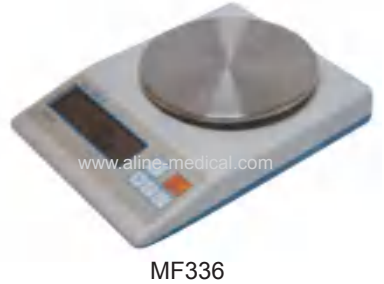
Model	MF334a	MF334b	MF334c	MF334d
Capacity(g)	200	500	1000	2000
Readability(g)	0.1			0.5
Linearity error(g)	⩽±0.2			⩽±1
Reproducibility(g)	⩽0.1			⩽0.5
Calibration way	External Calibration with optional weight			
Tare range(g)	0-200	0-500	0-1000	0-2000
Pan size(mm)	Φ130			173x135
Housing dimensions(mm)	230x178x66			
Power supply	220VAC			



MF335

Mini(Pocket) Balance
Using Strain Gauge,LCD display.It is easy to operate and carry about,performance of weighing is stability and reliability.


Model	MF335	Stable time	3S
Capacity(g)	200/240	Temperature for use	0-40
Readability(g)	0.1	Platform size(m)	74x71
Reproducibility(g)	0.1	Dimensions(mm)	132x75x19
Linearity error(g)	⩽±0.1	Net weight(g)	130
Tare range(g)	200/240	Power supply	3xSR44/1.5V



MF336

Electronic General Balance
Using Strain Gauge,LCD display,8 weighing unit modes changing,counting,etc.AC/DC dualpurpose,easy to operate,performance of weighing is stability and reliability.

Model	MF336a	MF336b	MF336c
Capacity(g)	200	500	600
Readability(g)	0.1		
Linearity error(g)	⩽±0.2		
Reproducibility(g)	⩽0.1		
Tare range(g)	0-200	0-500	0-600
Pan size(mm)	Φ115		
Housing dimensions(mm)	190x138x28		
Power supply	6F22ND 9V(Optional AC/DC adapter)		



MF337

High-Capacity Electronic Precision Balances Using high precision Strain Gauge,LED display,outer casing is made of all aluminium casting,large double-layer stainless platform,It has stability and reliability of the weighing performance.Weighing modes changing for g-ct-oz,counting,etc.It is well above for the functions compare with the price.

Model	MF337a	MF337b	MF337c	MF337d
Capacity(g)	2000	3000	4000	5000
Readability(g)	0.1			
Linearity error(g)	⩽ ±0.2			
Reproducibility(g)	⩽0.1			
Calibration way	External Calibration with optional weight			
Data output	RS232 Interface			
Tare range(g)	0-2000	0-3000	0-4000	0-5000
Pan size(mm)	207x193			
Housing dimensions(mm)	310x210x93			
Power supply	220VAC			



MF338

Auto shut off(option)
Tare and zero functions
Auto calibration
Large digital LCD/LED display
Stainless weighting pan
Counting function
With Rs 232(option)
Measures: g,ct,oz,tl,tola,gn,dwt 14units(option)
Resolution:1/30000-1/200000
Power sources:6xAA batteries or AC/DC adaptor

MODEL	CAPACITY (g)	RESOLUTION(g)
MF338-300	300	0.01,0.005
MF338-600	600	0.02,0.01
MF338-1000	1000	0.02,0.01
MF338-2000	2000	0.01
MF338-3000	3000	0.01
MF338-6000	6000	0.2,0.1
MF338-10000	10000	1,0.5,0.2
Net /gross weight		1350/1500g
Package	Standard carton:34x22x14cm^3	

6 units in one box:47.5x38.5x45cm^3
Power supply AC/DC 9V 150Ma or 6xAA batteries/ recharge battery
Platter size:Round 115mm diameter rectangular 17x18mm



MF339

Auto shut off
Auto calibration
Auto zero tracking
Auto backlight
Low battery indication
Kg /g/ib/oz conversion
Large LCD (6 digits 15mm hight)
Large square weighting pan
Net weight /stability indication
1/2000-1/15000 division available
Package Standard carton:22x16x5cm^3
12 units in one box:59x37x39cm^3
Operating temperature:0-40℃(32-104° F)
Power source:4xAAA Size batteries Or AC/DC Adapter 6v/100mA(no included)

Model number	Capacity (g)	Division (g)
MF339-100	100	0.01
MF339-150	150	0.01
MF339-300	300	0.02
MF339-750	750	0.05
MF339-1500	1500	0.1
MF339-500	500	0.1
MF339-1000	1000	0.2
MF339-2500	2500	0.5
MF339-1000	1000	0.5/0.2
MF339-2000	2000	1
MF339-3000	3000	1g/2g
Platter	136x136mm/91x91mm	
Net/gross weight	460/650g	



MF340a



MF340b

Auto shut off
Auto calibration
Auto zero tracking
Backlight or counting function(optional)
Low battery indication
g/lb/oz/dwt conversion
Large LCD (6 digits 15mm hight)
Large circle standess weighting pan
Net weight /stability indication
1/2000-1/60000 division available
package Standard carton: 8units in one box:605x510x440mm
Operating temperature:0-40℃(32-104° F)
Power source:6xAA Size batteries Or AC/DC Adaptor 9v/100mA(no included)

Model number	Capacity (g)	Division (g)
MF340-100	100	0.005
MF340-200	200	0.01
MF340-300	300	0.01
MF340-600	600	0.01
MF340-1000	1000	0.5
MF340-2000	2000	1
MF340-3000	3000	1
MF340-5000	5000	1
MF340-6000	6000	1
MF340-10000	10000	2
Platte	Φ170mm/115mm	
Net weight /gross weight		620g/730g



MF341

Auto shut off
Auto calibration
Auto zero tracking
Auto backlight(optional)
Low battery indication
Large LCD
g/masha:ratti/tl/anna:ratti/tola/ct conversion(optional)
1/15000&1/60000division available
Package Standard carton:32.5x22.5x11.5cm^3
8units in one box:45.5x34x47cm^3
Operating temperature:0-40℃(32-104° F)
Power source:4x AA Size battery Or AC/DC Adapter 9v/100mA(optional)

Model	Capacity (g)	Division (g)
MF341-100	100	0.01
MF341-200	200	0.01
MF341-300	300	0.01
MF341-600	600	0.02
MF341-1000	1000	0.05
MF341-2000	2000	0.1
MF341-3000	3000	1
MF341-5000	5000	5
Platter	Φ150mm	
Net /gross weight	880g	1500g



MF342a

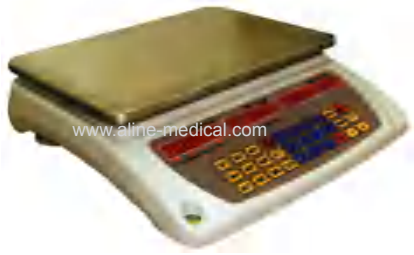


MF342b

Price computing ,counting&weight scale select-able.
Choose M-ACSxxxG/W for bench type scale or M-ACSxxxH with tower type.
Auto zero tracking,full tare subtraction.
Automatic overload display.
Two power sources:rechargeable battery and AC adaptor selectable
Back light display
Resolution:1/2000-1/60000
High accuracy load cell
Large LCD display.
Accumulation function
Dual display which is convenient for customers and operator(for price computing scale).
Automatic quantity alarming(for counting scale).

WEIGHING SCALE

MODEL	CAPACITY (KG)	RESOLUTION (G)
MF342-003W/W	3	0.2-1
MF342-006W/W	6	0.5-2
MF342-010W/W	10	0.5-5
MF342-020W/W	20	1-5
MF342-030W/W	30	2-10
Platter 250x180m	Net /gross weight	3.2kg/3.8kg
Operating temperature	0-40℃(32-104° F)	
Package	Standard carton:310x348x148(mm³)	
4units in one box:620x315x380(mm³)		
Power source	Recharge battery or AC/DC	
Adapter 10V/500mA (optional)		
MF342-1K5G/P	1.5	0.5
MF342-003G/P	3	0.5-1
MF342-7K5G/P	7.5	5
MF342-015G/P	15	2-5
MF342-030G/P	30	5-10
MF342-1K5G/C	1.5	0.05-0.1
MF342-003G/C	3	0.1-0.2
MF342-7K5G/C	7.5	0.2-0.5
MF342-015G/C	15	0.5-1
MF342-030G/C	30	1-2



MF343

Auto zero tracking
Automatic overload display
Backlight display
Resolution:1/2000-1/30000
High accuracy load cell
30keys,27 or more unit weight memory
9unit weight shortcut key
16 accumulate storage
Double LED or LCD display
Package Standard carton:39.5x39x16.5cm³
2 units in one box:40.5x40x33.5cm³
Operating temperature 0-40℃(32-104° F)
Power source Recharge battery or AC/DC
Adapter 10-12v/500Ma(optional)


Model	Capacity (kg)	Division(g)
MF343-1.5	1.5	0.05
MF343-2	2	0.1
MF343-3	3	0.1
MF343-5	5	0.2
MF343-6	6	0.2
MF343-7.5	7.5	0.5
MF342-10	10	0.5
MF342-12	12	0.5
MF342-15	15	0.5
MF342-20	20	1
MF342-30	30	1
Platter	335x230	
Net /gross weight		4.9/5kg



MF344

Auto zero tracking
Automatic overload display
Backlight display
Resplution:1/2000-1/30000
High accuracy load cell
Large LCD display
30 keys ,9 unit weight memory
Tired add 99 times
Accumulation 4 units (kg/g/lb/ozbig LCD screen
Operating temperature:0-40℃(32-104° F)
Power source Recharge battery or AC/DC
Adapter 10-12v/500Ma(optional)

Model	Capacity (kg)	Division(g)
MF344-1.5	1.5	0.05
MF344-3	3	0.1
MF344-6	6	0.1
MF344-7.5	7.5	0.2
MF344-12	12	0.5
MF344-15	15	0.5
MF344-30	30	1
platter	335x230mm	
Net /gross weight	3.95/4.9kg	
Package	Standard carton:39.5x39x16.5cm³	
2 units in one box:40.5x40x33.5cm³		



MF345

Auto shut off (optional)
Auto calibration
Auto zero tracking
Auto backlight(optional)
Low batter indication(optional)
Kg/g/lb/oz comversion(optional)
Double LCD
Large square weighting pan
Net weight /stability indiction
1/2000,1/5000&1/30000 division available
Possess the function of anti-water

Model	Capacity (kg)	Division(g)
MF345-3kg	3	0.1
MF345-6kg	6	0.2
MF345-15kg	15	0.5
MF345-30kg	30	1
MF345-3kg	3	0.5
MF345-6kg	6	1
MF345-15kg	15	2
MF345-30kg	30	5
platter	218x168mm	
Net /gross weight	3000/3500g	
Package	Standard carton:31.5x27.5x21.5cm³	
4 units in one box:65x56x24cm³		
Operating temperature	0-40℃(32-104° F)	
Power source	battery or AC/DC	
Adapter 10-12v/500Ma(optional)		



MF346a

Price computing ,counting &weighing scale selectable.
Choose ACSxxxA/W for bench type scale or ACSxxxB for tower type.
Auto zero tracking
Automatic overload display.
Backlight display.
Resolution :1/2000-1/30000
High accuracy load cell
Large LCD display which is convenient for customers and operator (for price conputing scale)
Automatic quantity alarming(for counting scale)
Platter 335x220mm
Net /gross weight 4.35kg/4.95kg
Package Standard carton :425x365x170mm^3
2 units in one box :445x470x365mm^3
Operating temperature 0-40℃(32-104° F)
Power source Recharge battery or AC/DC
Adapter 10V/500Ma(optional)
Price computing scale

Model	Capacity(kg)	Resolution(g)
ACS1K5A/P /ACS1K5B/P	1.5	0.5
ACS003A/P /ACS003B/P	3	1
ACS006A/P/ACS006B/P	6	2
ACS015A/P/ACS015B/P	15	5
ACS030A/P/ACS030/P	30	5/10
ACS1K5A/C/ACS1K5B/C	1.5	0.05/0.1
ACS003A/C/ACS003B/C	3	0.1/0.2
ACS7K5A/C/ACS7K5B/C	7.5	0.2/0.5
ACS015A/C/ACS015B/C	15	0.5/1
ACS030A/C/ACS030B/C	30	1/2
ACS003A/W	3	0.1-1
ACS006A/W	6	0.2-2
ACS010A/W	15	0.5-5
ACS020A/W	20	1-5
ACS030A/W	30	1-10



MF346b



MF347a

Price computing ,counting&weighing scale selectable.
Choose ACSxxxA/W for bench type scale or ACSxxxB for tower type.
Auto zero tracking
Automatic overload display
Backlight display
Resolution:1/2000-1/3000
High accuracy load cell.
Large LCD display.
Accumulation function.
Dual display which is convenient for customers and operator(for price computing scale)
Automatic quantity alarming(for counting scale).

WEIGHINGING SCALE

Model	Capacity(kg)	Resolution(g)
ACS003W/W	3	0.1-1
ACS006W/W	6	0.5-2
ACS010W/W	10	0.5-5
ACS015W/W	15	0.5-5
ACS030W/W	30	1-10
Platter:255x190mm	Net/gross weight:3.9kg/4.6kg	
Operating temperture	0-40℃(32-104 F)	
Package	Standard carton:425x365x170mm^3	
2 units in one box :445x400x378mm^3		
Power source	Recharge battery or AC/DC	
Adapter 10V/500Ma (optional)		
ACS 1K5G/C ACS1K5H/C	1.5	0.1/0.2/0.05
ACS003G/C ACS003H/C	3	0.2/0.5/0.1
ACS7K5G/C ACS7K5H/C	7.5	0.5/1/0.2
ACS015G/C ACS015H/C	15	1/2/0.5
ACS030G/C ACS030H/C	30	2/5/1
ACS1K5G/P ACS1K5H/P	1.5	0.5
ACS003G/P ACS003H/P	3	1
ACS7K5G/P ACS7K5H/P	7.5	2
ACS015G/P ACS015H/P	15	5
ACS030G/P ACS030H/P	30	5/10



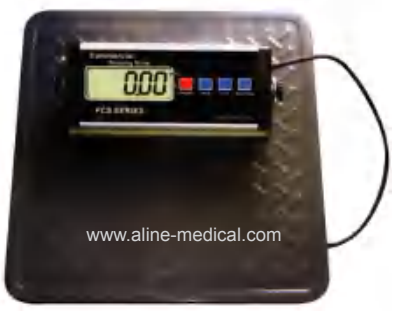
MF347b



MF348

Auto shut off(option)
Auto calibration
Auto zero tracking
Simple 4 button operation
Low battery indication
Kg/lb conversion
Low cost for many applications
Large LCD display
Hold function
With RS232

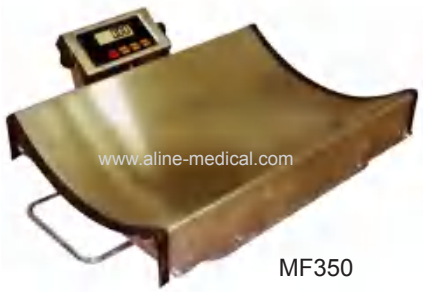
Model #	MF348-30	MF348-60	MF348-100	MF348-150
Maximum	30kg	60kg	100kg	150kg
Readability	0.01kg	0.02kg	0.05kg	0.1kg/0.05kg
Alternate weight units	66lbx0.02lb	132lbx0.05lb	221lbx0.1lb	332lbx0.2lb
Resolution	1:3000	1:3000	1:2000	1:1500
Tare range	Full range	Full range	Full range	Full range
Units of measure	Kb/lb/oz			
Stabilization time	1-2secs			
Operating temperature	0-40℃			
Power supply	6xAA Size batteries or 9V/100Ma AC adapter			
Calibration mass	20kg/50lb	40kg/100lb	100kg/200lb	150kg/330lb
Pan size	12.2'x11.8'/310x300mm			
Gross weight	5.5kg/12.1lb			
Package	Standard carton:395x510x90mm			
	5 units in one box:485x 420x536mm			



MF349

Auto shut off
Auto calibration
Auto zero tracking
Simple 4 button operation
Low battery indication
Kg/ib conversion
Low cost for many applications
Large LCD display
Hold function
With RS232

Model	MF349-30	MF349-60	MF349-100	MF349-150	MF349-300
Maximum capacity	30KG	60KG	100KG	150KG	300KG
Readability	0.01KG	0.02KG	0.05K	0.1KG	0.1KG
Alliterate weighing units	661bx0.02ib	130ibx0.05ib	2201bx0.1ib	3301bx0. 2ib	660bx0. 2ib
Resolution	1:3000	1:3000	1:2000	1:1500	1:3000
Tare range	Full range				
Units of measure	Kg/ib/oz				
Stabilization time	1-2secs				
Operating temperature	0-40℃				
Power supply	6xAA Size batteries or 9V 100Ma AC Adapter				
Calibration mass	20kg/50ib	40kg/100ib	100kg/200ib	100kg/200ib	200kg/400ib



MF350

Auto shut off(optional)
Auto calibration
Auto zero tracking
Large square weighing tray
Hold function
Large LCD (6 digits 15 mm high)
6 pieces Ni-CD rechargeable

Model	Capacity(kg)	Division(g)
MF350-30	30	10
MF350-60	60	20
MF350-150	150	50
MF350-200	200	20/50
Platter/tray	450x345mm	
Net/gross weight	12kg/13kg	
Package	Standard carton:49.5x52x17.5cm^3	
2 units in one box:52.5x37.5x55.5cm^3		
Operating temperature	Optimum:15-30℃ (62-90°F)	
Power source	6pieces NI-CD rechargeable	
	Or AC Adapter 10V/500mA	



MF351

40 keys.200 memory to memorize 200 goods'unit price.set 80unit price of goods that are used frequently.
Input 200 goods'unit price through computer or manual operation.
List information of sell list,unit price and total sale through printing function.
Thin and grace appearance,anti-dust ,anti-bug and anti-water.
LED display:weighing display 5bits,units price.total units display 10bits.
Indicator can revolve 90 degreen.
Platter size:335x230mm
Capacity :15kgx2g(0-6kg)/5g(6-15kg)
30kgx5g(0-10kg)/10g(10kg-30kg)



MF352a MF352b

Power:rechargeable battery 6xAA/AC adapter 9v 500Ma
Power saving
Operating temperature:5-35℃
Operating humidity:25%-95%RH
Zero range(4% to full capacity)
Tare range(100% to full capacity)
Two calibration weight units:kg/lb
Open calibration weight
Power on zero-setting range : ± 10%
Zero range: ± 4% of full capacity
Three modes: normal mode/setting mode ./internal auto calibration mode
RS232 function
Capacity /division

CAPACITY	DIVISION	DIVISION2	DIVISION3
2.5/3kg	0.5g	1g	2g
5/6kg	1g	2g	5g
10/15 kg	0.002 kg	0.005 kg	0.01 kg
25/30 kg	0.005 kg	0.01 kg	0.02 kg
50/60 kg	0.01 kg	0.02 kg	0.05 kg
100/150 kg	0.02 kg	0.05 kg	0.1 kg
250/300 kg	0.05 kg	0.1 kg	0.2 kg
Scale size	The height of MF352a is 500mm		
	The height of MF352b is 10000mm		
Platter	310x300mm		

ZERTIFIKAT ◆ CERTIFICATE ◆ 证书 ◆ СЕРТИФИКАТ ◆ CERTIFICADO ◆ CERTIFICAT

Product Service

CERTIFICATE

No. Q4N 07 09 64660 004

Holder of Certificate: Hospital & Homecare IMP. & EXP. Co., Ltd. Nanjing
No. 2901-2902 West Fortune Building
No. 359 Hongwu Rd.
210002 Nanjing
PEOPLE'S REPUBLIC OF CHINA

Facility(ies): Hospital & Homecare IMP. & EXP. Co., Ltd. Nanjing
No. 2901-2902 West Fortune Building, No. 359 Hongwu Rd.,
210002 Nanjing, PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

Scope of Certificate: **Distribution of Blood Band Products,
Nursing and Surgical Accessories,
Respiratory Ranges, Condoms,
Non-woven and PE/CPE Surgical Products,
Medical Tubes and Catheters,
Surgical Dressings and Instruments,
Homecare and Dental Products, First-Aid Series,
Clinical Testing Chemistry Reagents & Test Paper,
Clinical Testing Devices & Assay Instruments,
Medical Optical Devices & Endoscopes,
Wound Care Devices & Appliance,
Diagnosis & Observation Equipments,
Acupuncture, Model Series,
Physical Therapy & Convalesce Equipments**

Applied Standard(s): **ISO 13485:2003
Medical Devices : Quality Management Systems - Requirements for regulatory purposes**

The Certification Body of TÜV SÜD Product Service GmbH certifies that the company mentioned above has established and is maintaining a quality system which meets the requirements of the listed standard(s). See also notes overleaf.

Report No.: 70198728704

Valid until: 2010-05-31

Date, 2007-11-15

Reiner Kramme

Page 1 of 1

TÜV SÜD Product Service GmbH
Zertifizierstelle
Ridlerstr. 65 · 80339 München
Germany

Akkreditiert durch
Zentralstelle der Länder für Gesundheitsschutz bei Arzneimitteln und Medizinprodukten
ZLG-ZQ-999.98.12-46

Jiangsu TUV Product Service Ltd. Shanghai Branch
18F, West Building, New Hua Lian Mansion, No. 775 Huaihai Rd. (M), 200020 Shanghai, P.R. China

China

Date: 2007-05-18

To Whom It May Concern

This letter is to certify that Hospital & Homecare IMP. & EXP Co., Ltd. Nanjing (address: No. 2901-2902 West, Fortune Building No. 359 Hongwu Road., Nanjing), whose QMS certificate with the scope "Q4N 07 09, 64660, 004: Distribution of Blood Band Products, Nursing and Surgical Accessories, Respiratory Ranges, Non-woven and PE/CPE surgical products, Medical Tubes and Catheters, Surgical Dressings and instruments, Homecare and Dental Products, First-Aid series, Chemistry Reagents & Test Paper, Lab and Clinical Testing Devices & Assay Instruments, Medical Optical Devices & Endoscopes, Ward Care Devices & Appliance, Diagnosis & Observation Equipments, Acupuncture, model series, Physical Therapy & Convalesce Equipments."

Products covered by QMS listed in follow:

1. Blood Band Products:
Vacuum blood collection tubes, Lancet devices, Single-use blood lancet, Single-use blood sampling device, Vacuum blood collection needles, Tourniquet, Holder -blood collection needle, Blood bag.

2. Nursing and Surgical Accessories:
Identification bracelet, Umbilical cord clamp, Three-way stopcock, Heparin cap, Urethral catheter tray, AV fistula needle, Scalp vein set, Anesthesia needle, Epidural needle · Spinal needle, I.V. cannula , I.V. catheters, Disposable hypodermic needle, Dental needle, Disposable sterilized syringe, Self-Destructive Syringe, Insulin Syringe, Burette Infusion Set, Infusion Set, Blood transfusion Set, Irrigation Syringe, Vaginal Irrigation Set, Urine Bag, Colostomy discharge bags, Leg bags, Pediatric Suction Set, Wound drainage Reservoir, intubating stylet, PE Gloves, Latex Surgical Gloves, Latex Examination Gloves, Nitrile Examination Gloves, Vinyl Gloves, Disposable

Telephone: +86 25 8191 0122
Fax: +86 25 857 0380
http://www.tuv-sud.cn
Jiangsu TUV Product Service Ltd. Shanghai Branch
TUV SUD Group
18F, West Building, New Hua Lian Mansion, No. 775 Huaihai Rd. (M), Shanghai, 200020
P.R. China

China

Stitch Cutter Blade, Disposable Skin Graf Blade, Disposable Surgical Razor, Disposable Surgical Blade, Surgical Steel Scalpel, Disposable Surgical scalpel .

3.Respiratory Ranges:
Oxygen Mask, High Concentration Oxygen Mask, Tracheostomy mask, Multi-Vent Mask, Aerosol Mask, Nebulizer Kit, Drug Nebulizer, Humidifier, Anaesthesia Mask, Laryngeal Mask, Non-rebreath Mask, Airway, Manual resuscitator.

4. Non-woven and PE/CPE surgical products:
Surgical Gowns Isolation Gown, Protection Gown, Non-woven Products (Non-woven Shoes Covers, Non-woven Cap, Non-woven Sleeves, Non-woven/paper Face Mask · Non-woven swabs), Plastic Products (PE/CPE Apron, PE/CPE Shoes Covers, PE/CPE boot cover,PE/CPE cap, PE/CPE sleeves, PE/CPE gloves, PE/CPE mattress cover, PE/CPE pillow cover).

5. Medical Tubes and Catheters:
Latex Foley Catheter, All silicone foley cathers, All Silicone gastric Levin tube, Nasal Oxygen Cannula, Nelaton Catheter, Suction Catheter, Feeding Tubes, Rectal Tubes, Drainage Tube, Extension Tubing, 3-Way Stopcock with Extension Set, Infusion Connection Tube, Latex Penrose Tubing, Yankauer Handle, stomach tube, Endotracheal Tube, Reinforced Endotracheal Tube, Tracheostomy Tube, Tracheobronchial Tubes, Male External Catheter, T Tube, Latex male condom.

6.Surgical Dressings and instruments:
Medical Hot Melt Adhesive Dressing, Bandage(Spandex elastic bandage, High elasticity bandage,P.B.T elastic bandage, Cotton elastic bandage, Reticular bandage), Zinc Oxide Adhesive Plaster, Sterile hemostasis adhesive dress(Wound Plaster/Liquid Transfusion Plaster/Adhesive Wound Dressing),Absorbent Cotton Rolls, Cotton Balls, Absorbent Gauze Products (Including gauze roll, gauze sponges, gauze balls, lap Sponges, triangular bandage, gauze bandage, ZIG-ZAG gauze),Dental Cotton Rolls, Surgical Towel, Plaster of Paris bandage, Orthopaedic Padding, A Gauze & Cotton Tissue, Eye Pad, Scissors, Nippers.

7.Homecare and Dental Products:
Scales(weighing scale and bathroom scale), Hot & Cold pack(box), Air cushion, Ear syringe,Stimulator,Household gloves,Hot water bag,massager,Glass cupping jars, Absorbent Sheet and Under pad, Adult Diaper, Baby diaper, Instant fee bag, Alcohol Pads, Dental floss,Dental needle ,Dental unit,Dental X-ray unit,Curing lighting, Computer-controlled Dental Systems, Dental Chair.

8.First-Aid series, Chemistry Reagents & Test Paper:
Rescue stretcher, Emergency Bed, Ambulance Bag,First Aid Kit (Box),Pill box, emergency ventilator, Urine and blood Test Strip, Pregnancy Test, Drug test strip.

9.Lab and Clinical Testing Devices & Assay Instruments:
Tips, Test Tube, Pipette, Sample Box, Centrifuge, Hematology Analyzer, Digital Electronic Balance, Laboratory glassware, porcelain production.

10.Medical Optical Devices & Endoscopes:
Cover Glass, Microscope Slide, Biological Microscope, Digital Microscope · Head light, Spectrophotometer,
flame photometer, Chromatograph, Microplate reader.

11. Ward Care Devices & Appliance:

China

Oxygen Concentrator, Suction Apparatus, Medical Rinse & Suction Unit, Transport Incubator, Neonate Phototherapy Unit, infant Radiant Warmer, Infant Incubator, Baby Scale, Oxygen Tank& Cylinder (steel), Bedsore Mattress, Operation Table,Syringe pump, Micro infusion Pump, Patient Monitor, Hot Water Bottles, Oxygen Regulator, Shadowless Operation Lamps, Operation Table, Electrocardiograph System, Suction machine, Nebulizer, sterilizer, blood glucose meter

12.Diagnosis & Observation Equipments:
Wooden Tongue Depressor, Speculum Vaginal, Nasal Specula,Clinical Thermometer (Mercury thermometer, Digital Thermometer, Infrared Ear Thermometer),Aneroid Sphygmomanometer, Mercurial Sphygmomanometer, Digital Blood Pressure Monitor, **Electronic Baby Scale, Body-Weight Scale,** Stethoscope, Diagnostic set for eye, ear, nose and larynx, otoscope , Otoscopy set, Laryngoscopy set, Pen light.

13. Acupuncture, model series.
Acupuncture needle, Acupuncture instrument set, Disposable press needle, model, Acupuncture model, Electric acupuncture unit.

14.Physical Therapy & Convalesce Equipments:
Walkers, Sticks, Wheelchair, Crutch, hammer massager.

Linjun Lv

Medical-Health-Service Dept.

TUV Product Service Ltd.

2007.5.18

HOSPITAL & HOMECARE I/E. CO., LTD.NANJING CHINA
HOSPITAL & HOMECARE MEDICAL DEVICE CO.,LTD.CHINA

EMAIL:
am@aline-medical.com
info@aline-medical.com
www.aline-medical.com
www.hospital-homecare.com
TEL:025-84573232/84577222
FAX:025-84577220/84577200
ADDRESS:Room 608-611,NO.5 Zhongtai International Plaza,
NO.311 Middle of Jiangdong Road,Central Business District,Nanjing, China
P.C:210000
中泰国际广场5栋608-611室，南京市江东中路311号